RUBBER FLOORING

RUBBER FLOORING

Rubber flooring in general
Rubber floors are naturally flexible and can withstand high walking loads and are also resistant to water and moisture. The rubber is typically non-conductive and absorbs vibrations well. They are great for shock absorption and are therefore popular in hockey stadiums, on shelves, gym areas, etc. Walking on the floor counteracts fatigue.

Applications
Interior and exterior floors
Pads for heavy metal objects
Floors in hockey stadiums and fitness centers
For car workshops with oil
Shelf protection pads
Floors for pets

Available features - general properties (anti-slip, vibration damping, flexibility, durability, easy maintenance), flame retardant, oil resistant, resistance to high temperatures and UV radiation, increased abrasion resistance.
Available in various thicknesses and harnesses.
Packed in 10m rolls.

AVAILABLE APPLICATIONS

GENERAL USE

Floring for non-aggressive interior environments. The hardness of the standard version is 80 Shore, which means high dimensional and dimensional stability and resistance to mechanical damage. Made of SBR and NR rubbers.

OIL RESISTANT

Flooring for indoor environments, in which the floor regularly comes into contact with mineral oils (NBR45 series) and gasoline, resp. isooctanes (higher NBR72 series). Made of NBR synthetic rubbers.

HEAT RESISTANT

Interior and exterior flooring, resistant to high temperatures, weathering, UV radiation, acid and alkalis. In hardness 80 Sh A (EPDM96 series), 70 Sh A (EPDM95 series) and 60 Sh A (EPDM15 series). Made of synthetic EPDM rubbers.

FLAME RETARDANT


Tile in the classic money pattern S-8. Suitable for environments where there is a higher risk of fire. According to the EN13501 standard, it is classified as a non-flammable building material in class C_{fl}-s1.

AVAILABLE COLORS



AVAILABLE PROFILES

Pattern S8, Pattern S4, Pattern S7, Pattern S6, Pattern S5, Pattern S2, Pattern S1

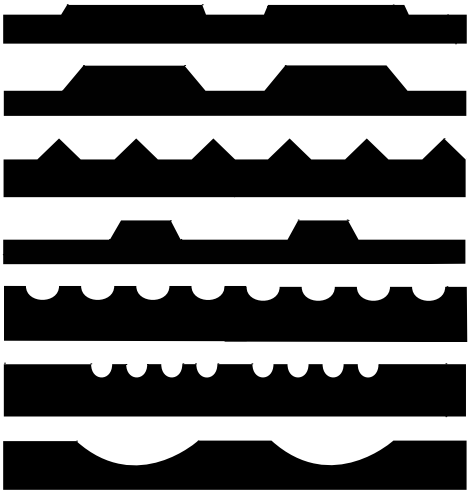

The bottom side has always a textile imprint, which ensures a better adhesion to the surfaces.

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk


S8 — CB 4
S4 — SBR76 5
S4 — SBR+ Flame retardant 6
S8 — SBR-COLOR 7
S8 — SBR-BLACK 8
S7 — SBR-COLOR 9
S7 — SBR-BLACK 10
S6 — SBR-COLOR 11
S6 — SBR-BLACK 12
S5 — SBR-COLOR 13
S5 — SBR-BLACK 14
S4 — SBR-COLOR 15
S4 — SBR-BLACK 16
S2 — SBR-COLOR 17
S2 — SBR-BLACK 18
S1 — SBR-COLOR 19
S1 — SBR-BLACK 20
S8 — NBR72 21
S8 — NBR45 23
S8 — EPDM96 25
S8 — EPDM95 26
S8 — EPDM15 27
S8 — SBR+ Flame retardant 28
S7 — NBR72 29
S7— NBR45 31
S7 — EPDM96 33
S7 — EPDM95 34
S7— EPDM15 35
S6 — NBR72 36
S6 — NBR45 38
S6 — EPDM96 40
S6 — EPDM95 41
S6 — EPDM15 42
S5 — NBR72 43
S5 — NBR45 45
S5 — EPDM96 47
S5 — EPDM95 48
S5 — EPDM15 49
S4 — NBR72 50
S4 — NBR45 52
S4 — EPDM96 54
S4 — EPDM95 55
S4 — EPDM15 56
S2 — NBR72 57
S2 — NBR45 59
S2 — EPDM96 61
S2 — EPDM95 62
S2 — EPDM15 63
S1 — NBR72 64
S1 — NBR45 66
S1 — EPDM96 68
S1 — EPDM95 69
S1 — EPDM15 70

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S8 — CB


RUBBER FLOORING COIN PATTERN — S8-CB

EXTERIOR	-40 – +120 °C	65 +/- 5 Sh A	12 MPa	4 mm	4.3 kg/m²
ENVIRONMENT	TEMPERATURE RANGE	HARDNESS	TENSILE STRENGTH	THICKNESS	BASIS WEIGHT



Bottom side - cloth impression



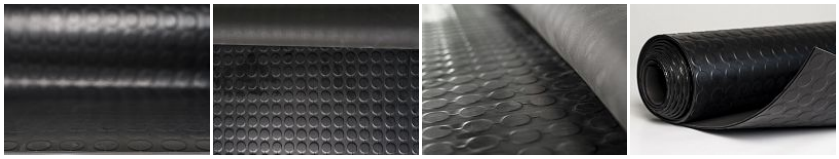

ADDITIONAL INFORMATION

Polymer content: 58 % EPDM, 19 % NR, 23 % SBR

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. With a coin pattern (round stud) type S8, heat-resistant in black color. In standard thickness 4 mm. It weighs 4.2 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm (+/- 0,3 mm)

WIDTH

1230 mm (+/- 10 mm)

LENGTH


10 m (+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S4 — SBR76


RUBBER FLOORING WIDE RIBBED PATTERN — S4-SBR76

INTERIOR ENVIRONMENT	80 +/- 5 Sh A HARDNESS	5 -6 mm THICKNESS	5.9 -7.4 kg/m² BASIS WEIGHT



Bottom side - cloth impression



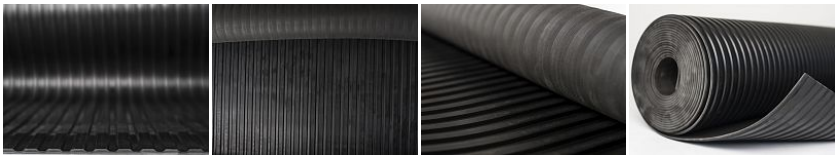

RESISTANCE

Abrasion resistance	HIGHLY RESISTANT
Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. With a wide ribbed type S4, in black color. In standard thickness 6 mm. It weighs 6.3 kg / m2.

CONFIGURATION OPTIONS

THICKNESS

5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)

WIDTH

1230 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S4 — SBR+ Flame retardant


RUBBER FLOORING WIDE RIBBED PATTERN — S4-N

INTERIOR	80 +/- 5 Sh A	6 mm	5.9 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT



Bottom side - cloth impression



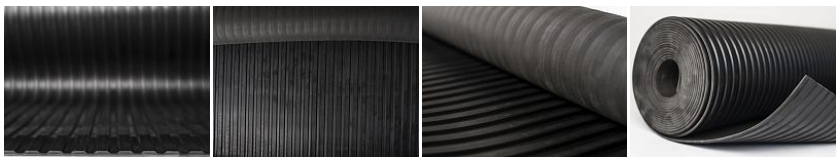

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. With a wide ribbed type S4, in black color. This flooring is flame retardant according to EN 13501 C_{fl}-s1. In standard thickness 6 mm. It weighs 5.9 kg / m2. Specify in the configurator.
This classification is valid for the following end use conditions: - Flooring laid on the any substrates of reaction to fire class $A1_{fl}$ or $A2_{fl}$.

CONFIGURATION OPTIONS

THICKNESS

6 mm (+/- 0,5 mm)

WIDTH

1230 mm (+/- 10 mm)

LENGTH

10 m (+/- 200 mm)

RESISTANCE


Flame retardant	YES
Abrasion resistance	HIGHLY RESISTANT
Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S8 — SBR-COLOR


RUBBER FLOORING COIN PATTERN — S8-SBR-COLOR

INTERIOR	80 +/- 5 Sh A	4 -10 mm	5.7 -16.1 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT



Bottom side - cloth impression



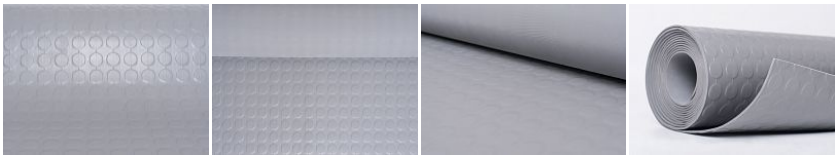

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. With a coin pattern type S8, in the basic design in five colors: gray, dark gray, blue, green, red and yellow. In standard thickness 4 mm. It weighs 5.7 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm	(+/- 0,3 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)

WIDTH

1230 mm	(+/- 10 mm)

LENGTH

10 m	(+/- 200 mm)

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE


Abrasion resistance	HIGHLY RESISTANT
Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT
	-

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S8 — SBR-BLACK


RUBBER FLOORING COIN PATTERN — S8 - SBR-BLK

INTERIOR ENVIRONMENT	80 +/- 5 Sh A HARDNESS	4 -12 mm THICKNESS	6 -19.9 kg/m² BASIS WEIGHT



Bottom side - cloth impression



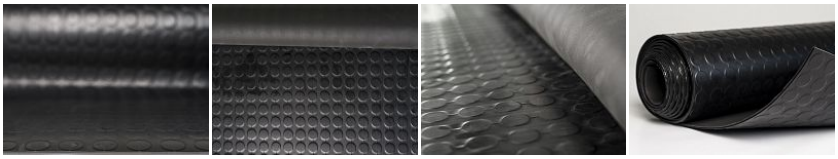

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Abrasion resistance	HIGHLY RESISTANT
Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. With a coin pattern type S8, in the basic design in black. In standard thickness 4 mm. It weighs 5.7 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm	(+/- 0,3 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)
12 mm	(+/- 1,0 mm)

WIDTH

1230 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk


S7 — SBR-COLOR


RUBBER FLOORING FINE RIBBED — S7-SBR-COLOR

INTERIOR	80 +/- 5 Sh A	3 mm	3.3 -3.4 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

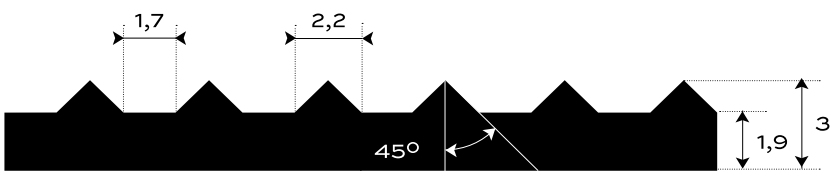

Bottom side - cloth impression

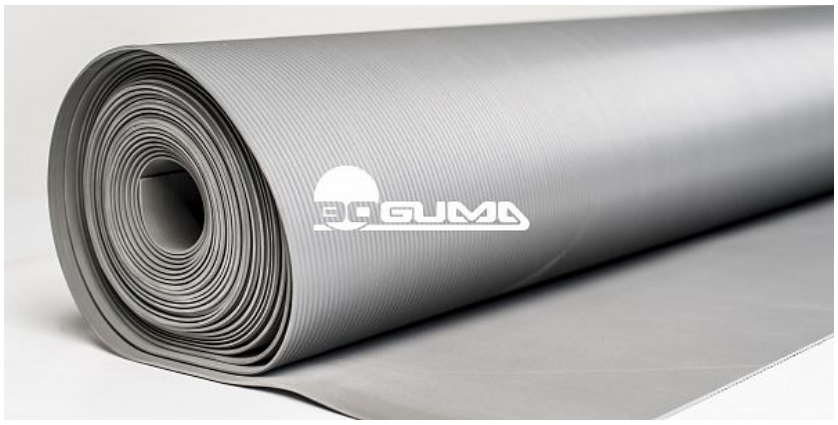

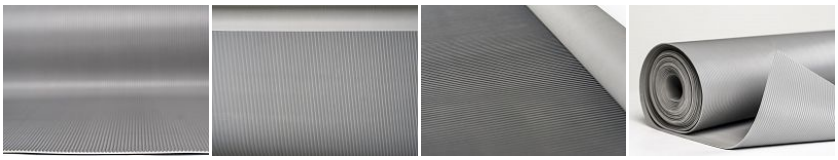

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a finely grooved design of the S7 type, in the basic design in three colors: gray, blue and green. In standard thickness 3 mm. It weighs 3.4 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S7 — SBR-BLACK


RUBBER FLOORING FINE RIBBED — S7-SBR-STD

INTERIOR	80 +/- 5 Sh A	3 mm	3.3 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

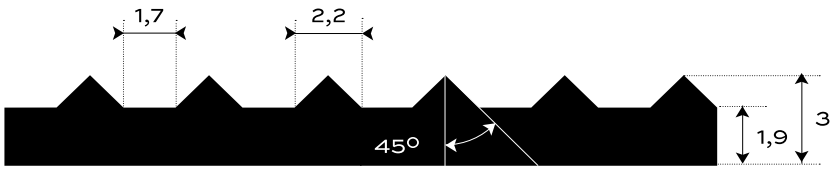

Bottom side - cloth impression



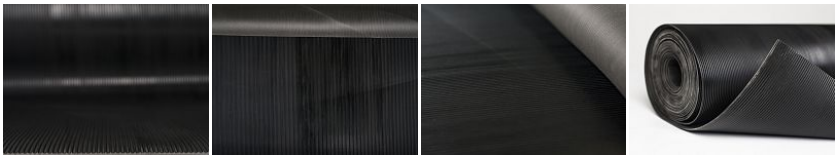

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a fine grooved design of the S7 type, in the basic design in black color. In standard thickness 3 mm. It weighs 3.4 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH

10 m	(+/- 200 mm)

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE


Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S6 — SBR-COLOR


RUBBER FLOORING WIDE RIBBED — S6-SBR-COLOR

INTERIOR ENVIRONMENT	80 +/- 5 Sh A HARDNESS	3.5 mm THICKNESS	3.5 -3.9 kg/m² BASIS WEIGHT



Bottom side - cloth impression



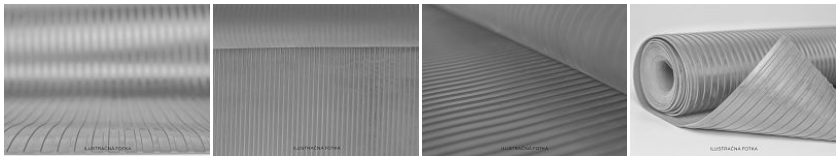

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and easy to maintain with easy handling. In a wide grooved design of the S6 type, in the basic design in three colors: gray, blue and green. In standard thickness 3.5 mm. It weighs 3.9 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3.5 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S6 — SBR-BLACK

RUBBER FLOORING WIDE RIBBED — S6-SBR-STD

INTERIOR	80 +/- 5 Sh A	3.5 mm	4.1 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT





Bottom side - cloth impression











ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S6, in the basic design in black color. In standard thickness 3.5 mm. It weighs 3.9 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3.5 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S5 — SBR-COLOR


RUBBER FLOORING FINE RIBBED — S5-SBR-COLOR

INTERIOR	80 +/- 5 Sh A	3 mm	4.1 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

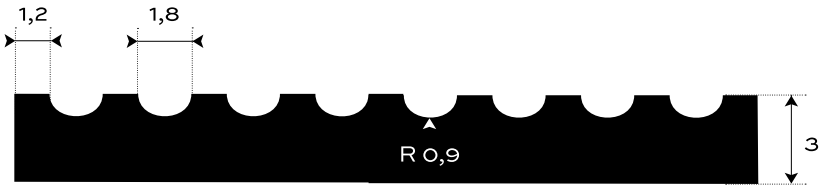

Bottom side - cloth impression



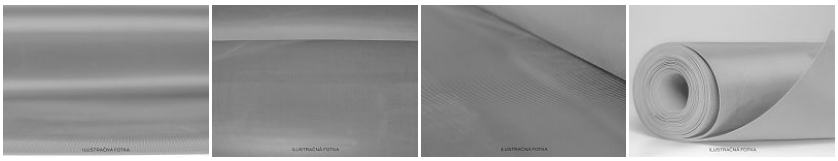

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a finely grooved design of the S5 type, in the basic design in three colors: gray, blue and green. In standard thickness 3 mm. It weighs 4.1 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S5 — SBR-BLACK


RUBBER FLOORING FINE RIBBED — S5-SBR-STD

INTERIOR	80 +/- 5 Sh A	3 mm	4.2 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

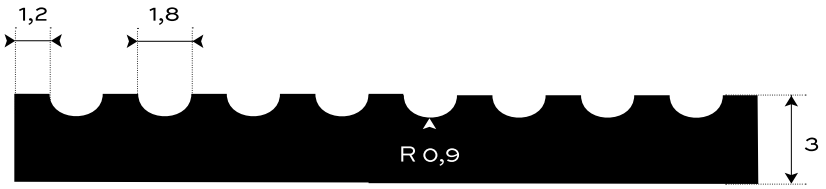

Bottom side - cloth impression



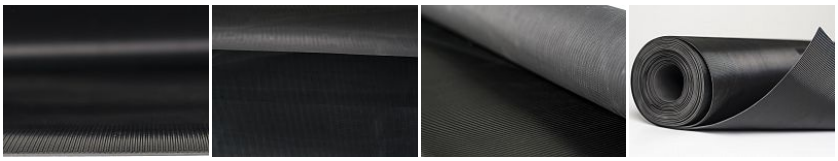

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a fine grooved design of the S5 type, in the basic design in black color. In standard thickness 3 mm. It weighs 4.1 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S4 — SBR-COLOR


RUBBER FLOORING WIDE RIBBED — S4-SBR-COLOR

INTERIOR	80 +/- 5 Sh A	6 mm	8 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT



Bottom side - cloth impression



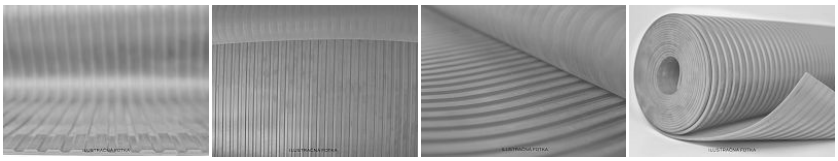

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide grooved design of the S4 type, in the basic design in three colors: gray, blue and green. In standard thickness 6 mm. It weighs 8 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

6 mm (+/- 0,5 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

LENGTH


10 m (+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S4 — SBR-BLACK


RUBBER FLOORING WIDE RIBBED — S4-SBR-STD

INTERIOR	80 +/- 5 Sh A	6 mm	7.4 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT



Bottom side - cloth impression



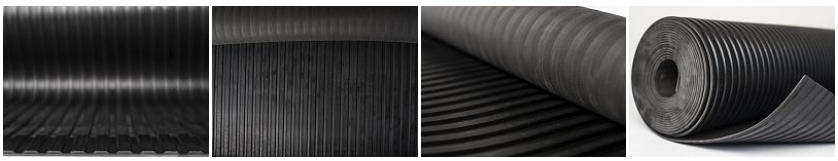

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S4, in the basic design in black color. In standard thickness 6 mm. It weighs 8 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

6 mm (+/- 0,5 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

LENGTH

10 m (+/- 200 mm)

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE


Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S2 — SBR-COLOR


RUBBER FLOORING FINE RIBBED — S2-SBR-COLOR

INTERIOR	80 +/- 5 Sh A	3 mm	3.9 -4.1 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

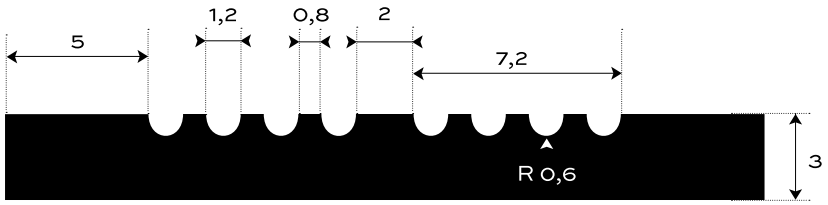

Bottom side - cloth impression



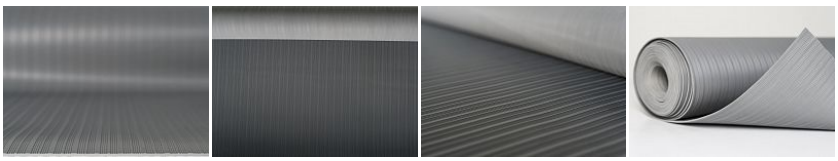

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a finely grooved design of the S2 type, in the basic design in three colors: gray, blue and green. In standard thickness 3 mm. It weighs 4.1 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S2 — SBR-BLACK


RUBBER FLOORING FINE RIBBED — S2-SBR-STD

INTERIOR	80 +/- 5 Sh A	3 mm	4.2 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

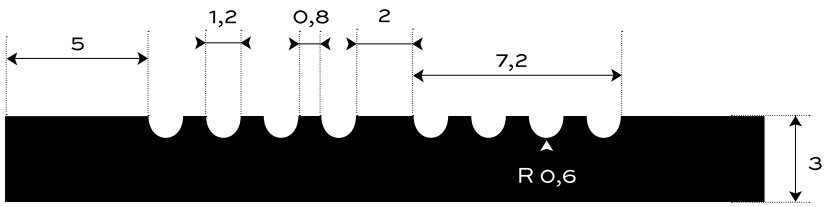

Bottom side - cloth impression



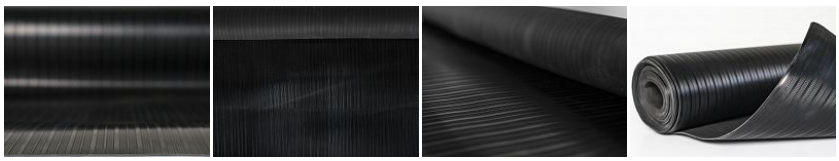

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a finely grooved design of the S2 type, in the basic design in black. In standard thickness 3 mm. It weighs 4.1 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S1 — SBR-COLOR


RUBBER FLOORING WIDE RIBBED — S1-SBR-COLOR

INTERIOR	80 +/- 5 Sh A	4 mm	4.5 -4.8 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

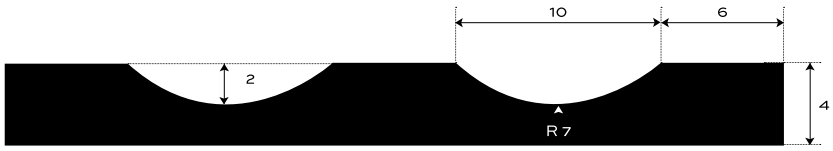

Bottom side - cloth impression



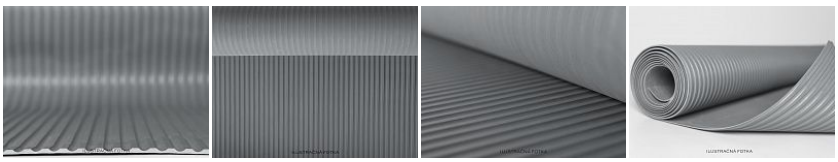

ADDITIONAL INFORMATION

Temperature range -25/+80 °C

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide grooved design of the S1 type, in the basic design in three colors: gray, blue and green. In standard thickness of 4 mm. It weighs 4.8 kg / m2. Finish your specification in configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH

10 m	(+/- 200 mm)


BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S1 — SBR-BLACK

RUBBER FLOORING WIDE RIBBED — S1-SBR-STD




INTERIOR ENVIRONMENT	80 +/- 5 Sh A HARDNESS	4 mm THICKNESS	4.7 kg/m² BASIS WEIGHT

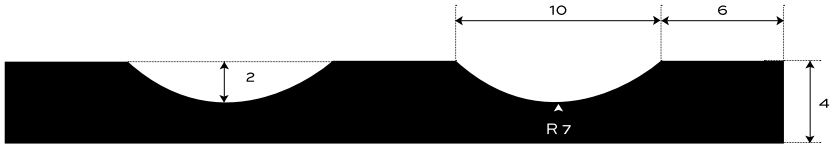

Bottom side - cloth impression



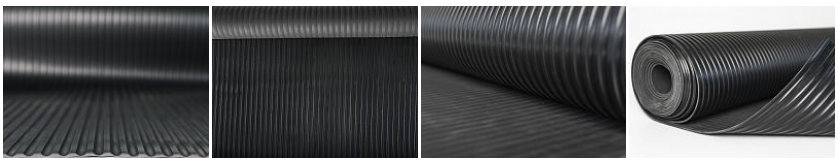

ADDITIONAL INFORMATION

Temperature range -25/+80 °C

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S1, in the basic design in black. In standard thickness 4 mm. It weighs 4.8 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S8 — NBR72


RUBBER FLOORING COIN PATTERN OIL-RESISTANT - S8-NBR72

INTERIOR	70 +/- 5 Sh A	4 -10 mm	5.2 -13.1 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT



Bottom side - cloth impression



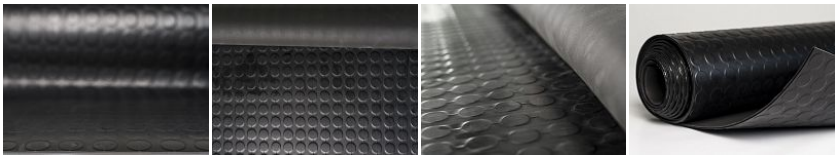

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. With coin pattern (round stud) type S8, oil-resistant in black. In standard thickness 4 mm. It weighs 5.1 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm	(+/- 0,3 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)

WIDTH

1230 mm	(+/- 10 mm)

LENGTH

10 m	(+/- 200 mm)

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE


Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S8 — NBR72

RUBBER FLOORING COIN PATTERN OIL-RESISTANT - S8-NBR72

7672 SWELLING RATES

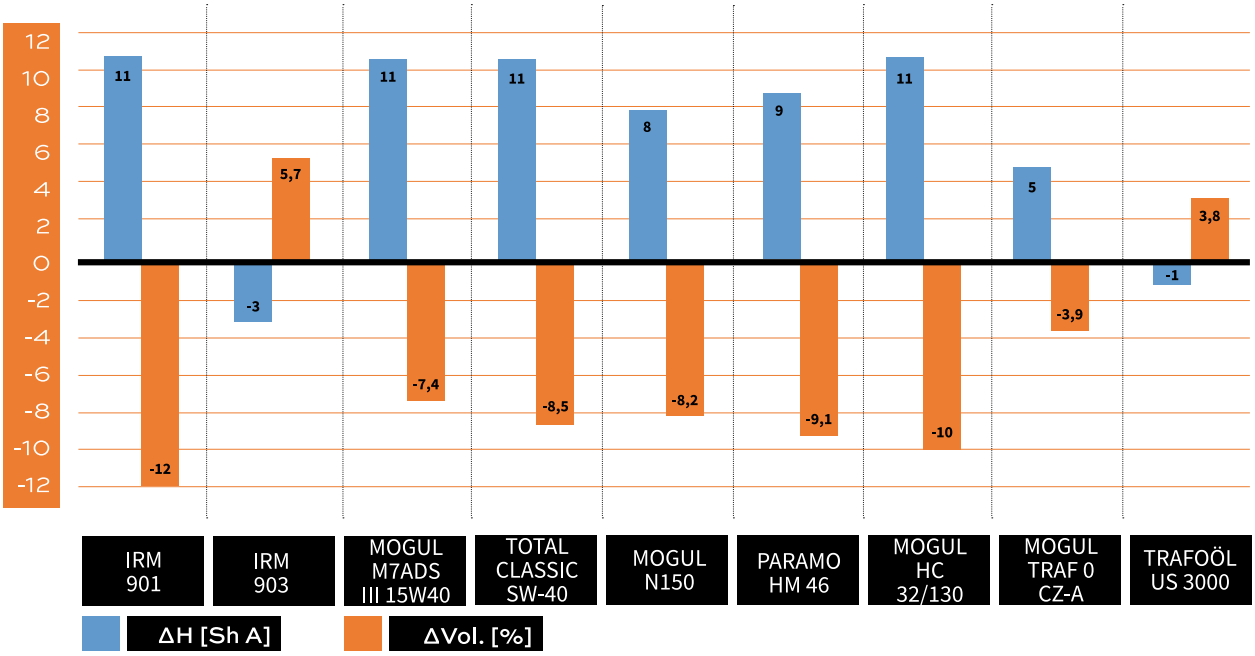


BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S8 — NBR45


RUBBER FLOORING COIN PATTERN OIL-RESISTANT - S8-NBR45

INTERIOR ENVIRONMENT	65 +/- 5 Sh A HARDNESS	4 -10 mm THICKNESS	6.3 -16.9 kg/m² BASIS WEIGHT



Bottom side - cloth impression



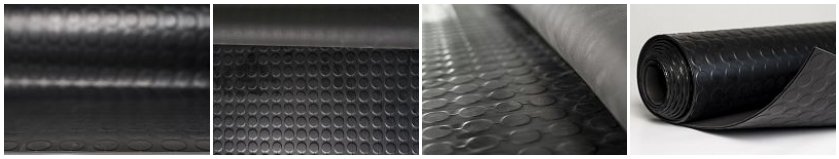

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	NO
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and easy to maintain with easy handling. With coin pattern (round stud) type S8, oil-resistant in black. In standard thickness 4 mm. It weighs 6.6 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm	(+/- 0,3 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)

WIDTH

1230 mm	(+/- 10 mm)


LENGTH

10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

RUBBER FLOORING COIN PATTERN OIL-RESISTANT - S8-NBR45

7645 SWELLING RATES

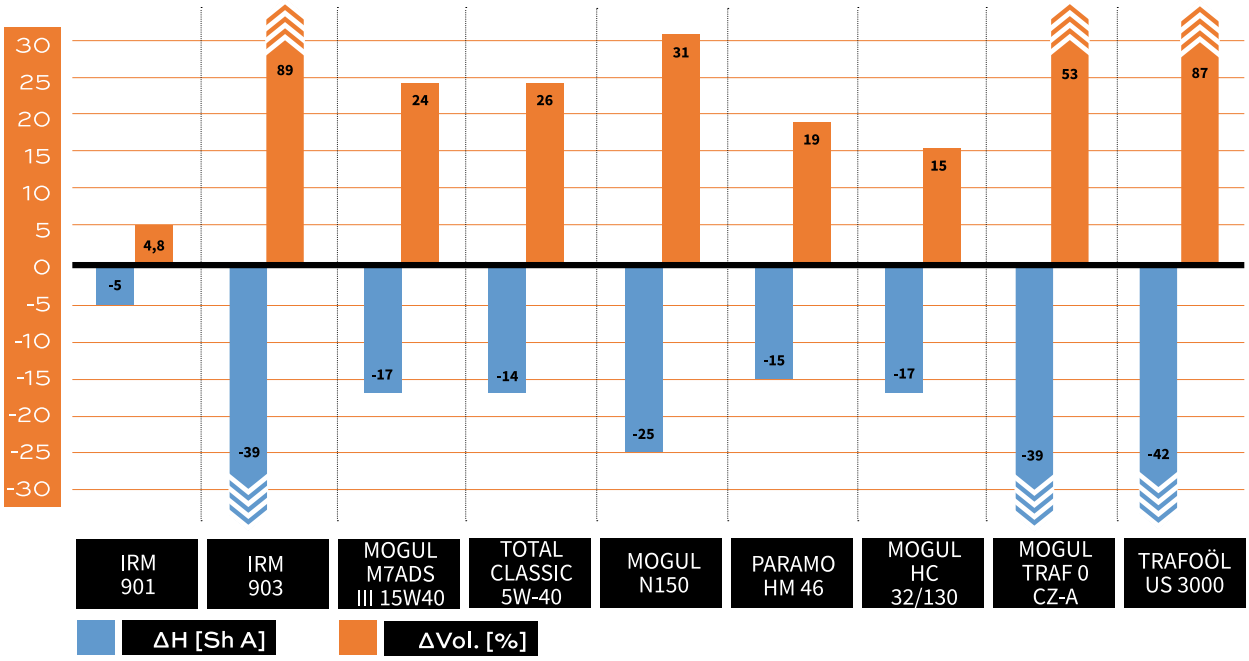


BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S8 — EPDM96


RUBBER FLOORING COIN PATTERN — S8-EPDM96

EXTERIOR	80 +/- 5 Sh A	4 -10 mm	5.2 -12.9 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT



Bottom side - cloth impression



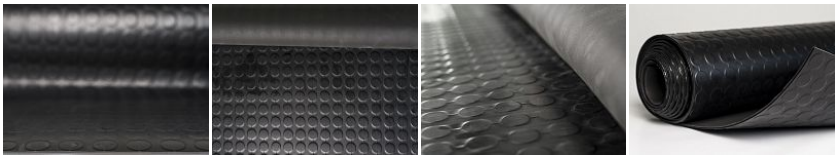

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. With a coin pattern (round stud) type S8, heat-resistant in black color. In standard thickness 4 mm. It weighs 4.9 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm	(+/- 0,3 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)

WIDTH

1230 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S8 — EPDM95


RUBBER FLOORING COIN PATTERN — S8-EPDM95

EXTERIOR	70 +/- 5 Sh A	4 mm	5.2 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT



Bottom side - cloth impression



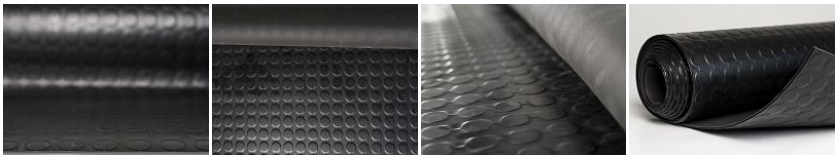

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. With a coin pattern (round stud) type S8, heat-resistant in black color. In standard thickness 4 mm. It weighs 4.9 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm (+/- 0,3 mm)

WIDTH

1230 mm (+/- 10 mm)

LENGTH

10 m (+/- 200 mm)

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE


Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S8 — EPDM15


RUBBER FLOORING COIN PATTERN — S8-EPDM15

EXTERIOR	60 +/- 5 Sh A	4 mm	5 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT



Bottom side - cloth impression



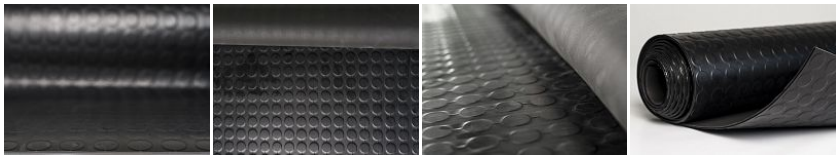

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. With a coin pattern (round stud) type S8, heat-resistant in black color. In standard thickness 4 mm. It weighs 4.9 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm (+/- 0,3 mm)

WIDTH

1230 mm (+/- 10 mm)

LENGTH

10 m (+/- 200 mm)

ADDITIONAL INFORMATION

Temperature range -40/+125 °C.

RESISTANCE


Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S8 — SBR+ Flame retardant


RUBBER FLOORING COIN PATTERN — S8-N

INTERIOR	80 +/- 5 Sh A	4 mm	5.9 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT



Bottom side - cloth impression



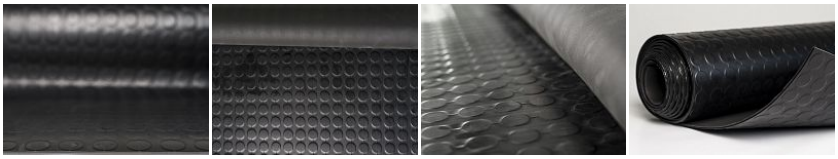

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. With a coin pattern (round stud) type S8, in black color. This flooring is flame retardant according to EN 13501 C_{fl}-s1. In standard thickness 4 mm. It weighs 5.9 kg / m2. Specify in the configurator.
This classification is valid for the following end use conditions: - Flooring laid on the any substrates of reaction to fire class $A1_{fl}$ or $A2_{fl}$.

CONFIGURATION OPTIONS

THICKNESS

4 mm (+/- 0,3 mm)

WIDTH

1230 mm (+/- 10 mm)

LENGTH

10 m (+/- 200 mm)

RESISTANCE


Flame retardant	YES
Abrasion resistance	HIGHLY RESISTANT
Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO
Mechanical puncture resistance	YES
Test for slip resistance	YES
Dielectric tests according given class	YES
Ageing tests	YES
Low temperature folding test	YES
Flame retardance test	YES
Oil resistance	YES
Acid resistance	YES

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S7 — NBR72


RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S7-NBR72

INTERIOR ENVIRONMENT	70 +/- 5 Sh A HARDNESS	3 mm THICKNESS	2.9 kg/m² BASIS WEIGHT

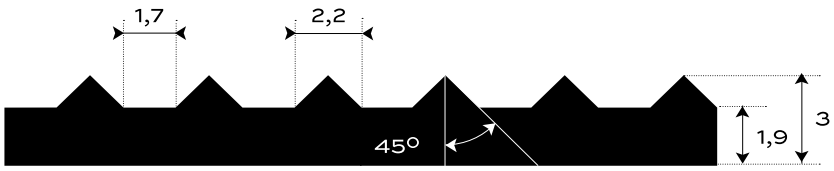

Bottom side - cloth impression



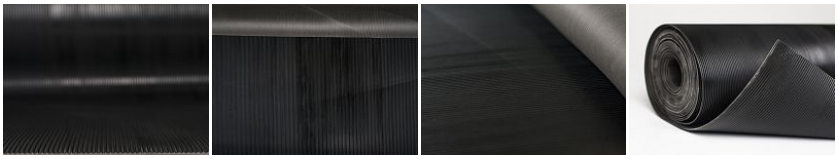

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

Rubber roofing for interior surfaces. Durable and easy to maintain with easy handling. In a fine grooved design type S7, oil-resistant in black color. In standard thickness 3 mm. It weighs 2.7 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)


LENGTH

10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S7-NBR72

7672 SWELLING RATES

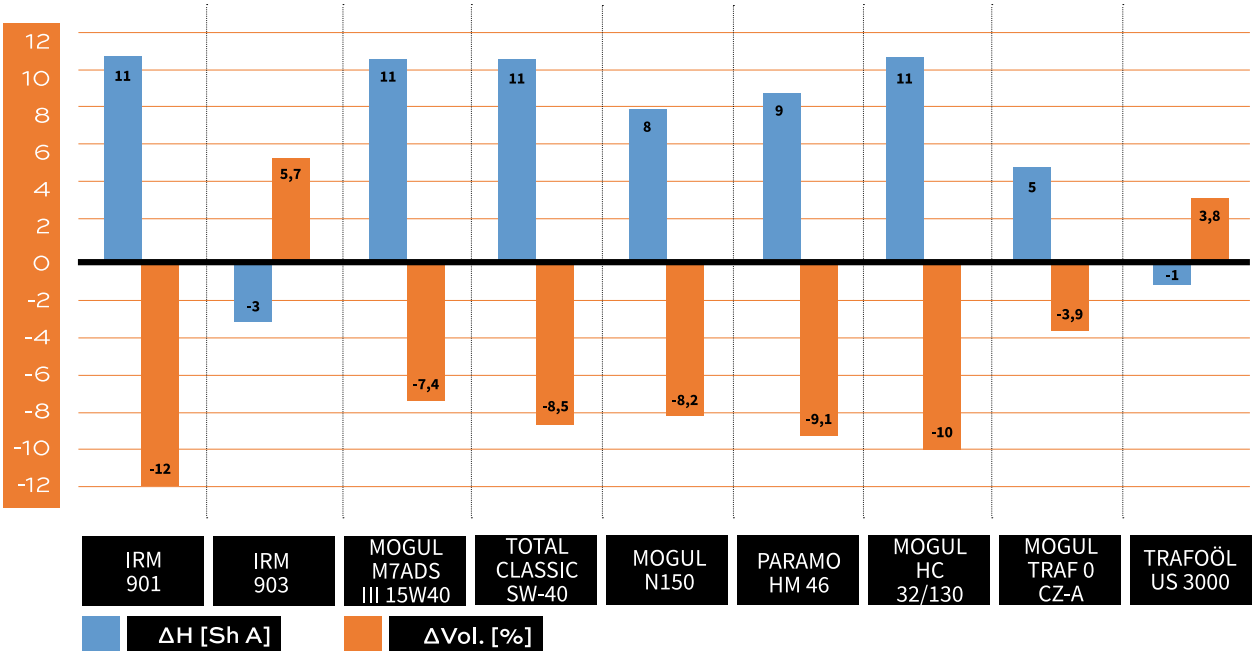


BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S7— NBR45


RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S7-NBR45

INTERIOR ENVIRONMENT	65 +/- 5 Sh A HARDNESS	3 mm THICKNESS	3.4 kg/m² BASIS WEIGHT

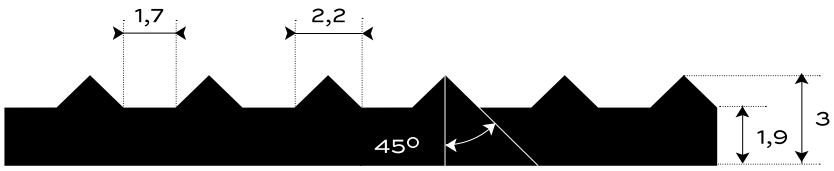

Bottom side - cloth impression



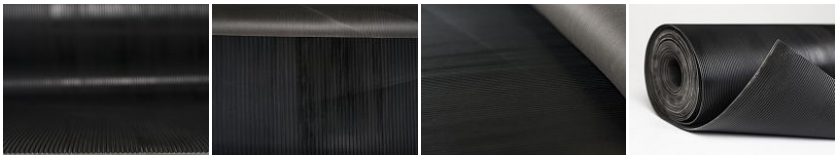

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	NO
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and easy to maintain with easy handling. In a fine grooved design type S7, oil-resistant in black. In standard thickness 3 mm. It weighs 3.6 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)


LENGTH

10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S7-NBR45

7645 SWELLING RATES

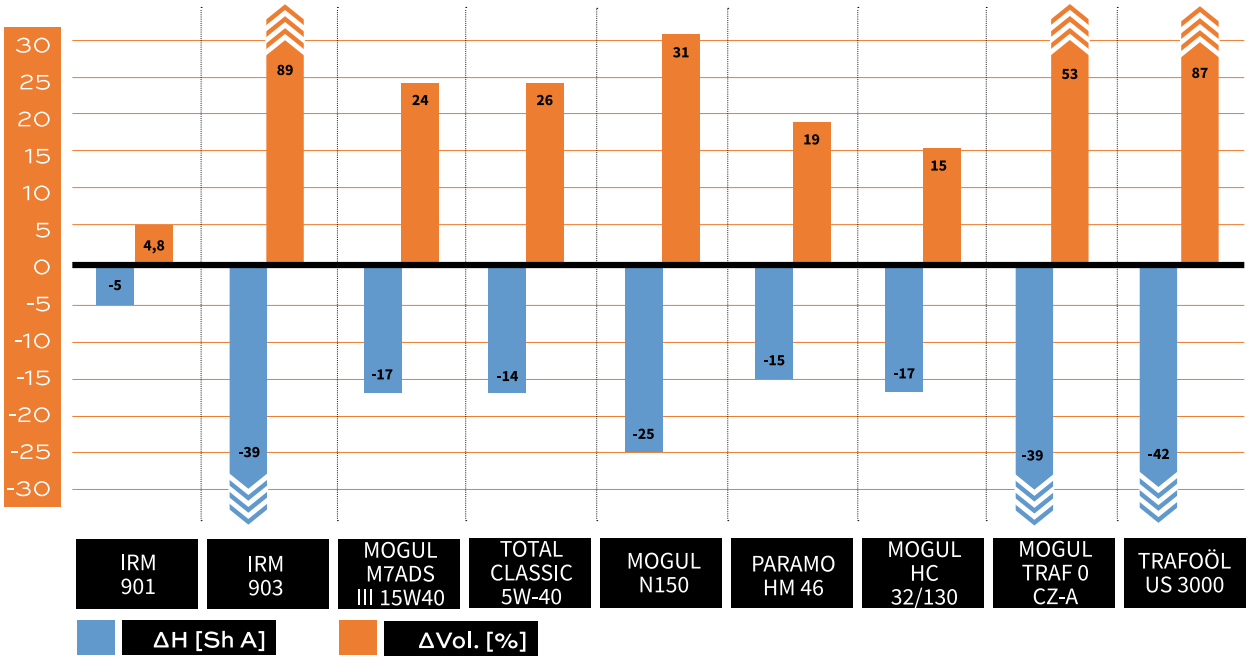


BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S7 — EPDM96


RUBBER FLOORING FINE RIBBED — S7-EPDM96

EXTERIOR	80 +/- 5 Sh A	3 mm	2.9 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

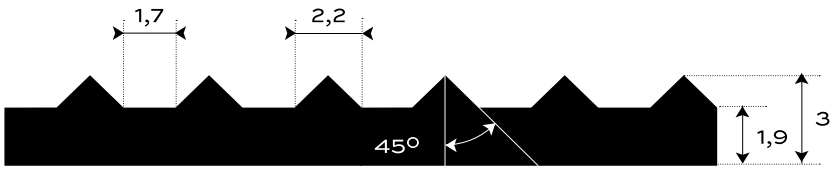

Bottom side - cloth impression



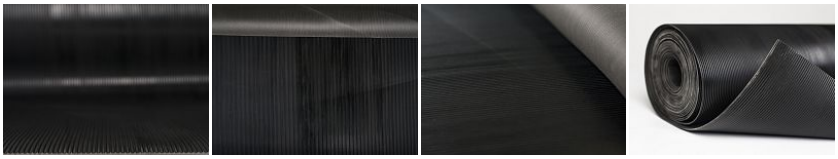

Rubber flooring for interior and exterior surfaces. Durable and easy to maintain with easy handling. In a finely grooved design type S7, heat-resistant in black. In standard thickness 3 mm. It weighs 2.7 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1000 mm	(+/- 10 mm)
1200 mm	(+/- 10 mm)

LENGTH

10 m	(+/- 200 mm)

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE


Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S7 — EPDM95


RUBBER FLOORING FINE RIBBED — S7-EPDM95

EXTERIOR	70 +/- 5 Sh A	3 mm	2.9 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

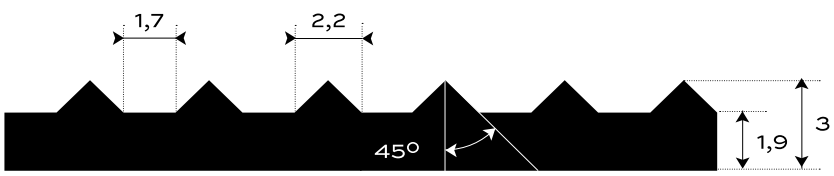

Bottom side - cloth impression



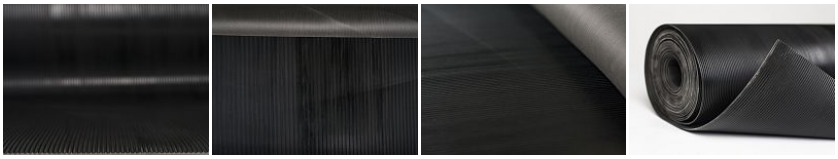

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber flooring for interior and exterior surfaces. Durable and easy to maintain with easy handling. In a finely grooved design type S7, heat-resistant in black. In standard thickness 3 mm. It weighs 2.7 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S7— EPDM15


RUBBER FLOORING FINE RIBBED — S7-EPDM15

EXTERIOR	60 +/- 5 Sh A	3 mm	2.8 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

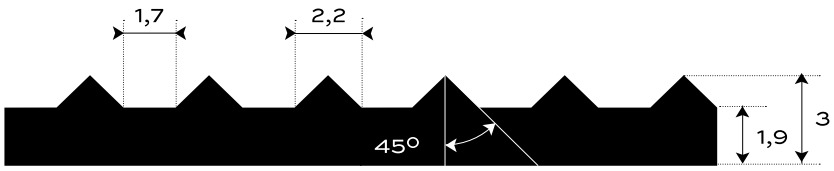

Bottom side - cloth impression



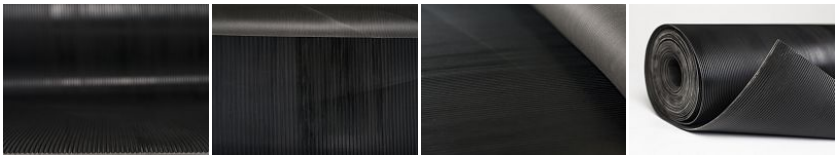

ADDITIONAL INFORMATION

Temperature range -40/+125 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

Rubber flooring for interior and exterior surfaces. Durable and easy to maintain with easy handling. In a finely grooved design type S7, heat-resistant in black. In standard thickness 3 mm. It weighs 2.7 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S6 — NBR72


RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S6-NBR72

INTERIOR ENVIRONMENT	70 +/- 5 Sh A HARDNESS	3.5 mm THICKNESS	3.1 kg/m² BASIS WEIGHT



Bottom side - cloth impression



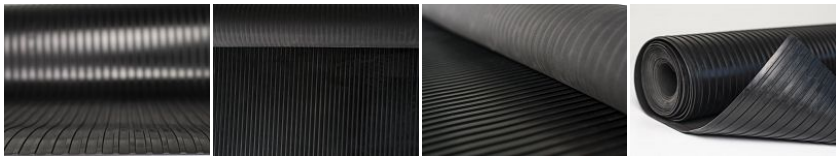

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

Rubber roofing for interior surfaces. Durable and easy to maintain with easy handling. In a wide grooved pattern type S6, oil-resistant in black color. In standard thickness 3.5 mm. It weighs 3.1 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3.5 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S6 — NBR72

RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S6-NBR72

7672 SWELLING RATES

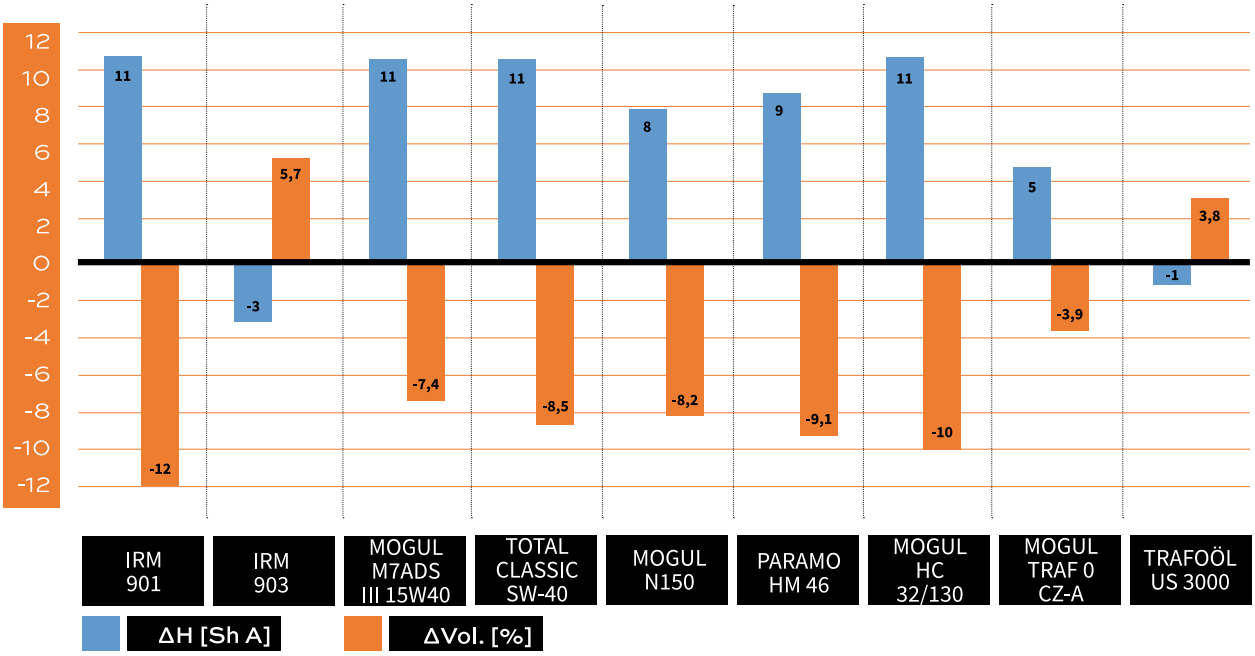


BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S6 — NBR45


RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S6-NBR45

INTERIOR ENVIRONMENT	65 +/- 5 Sh A HARDNESS	3.5 mm THICKNESS	4.1 kg/m² BASIS WEIGHT



Bottom side - cloth impression



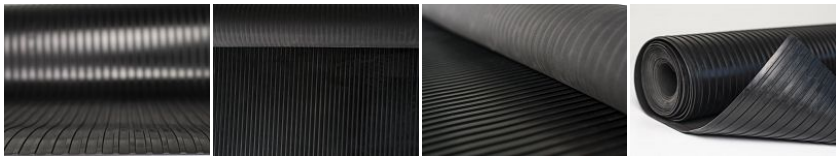

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	NO
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and easy to maintain with easy handling. In a wide ribbed pattern type S6, oil-resistant in black color. In standard thickness 3.5 mm. It weighs 4.1 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3.5 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S6 — NBR45

RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S6-NBR45

7645 SWELLING RATES

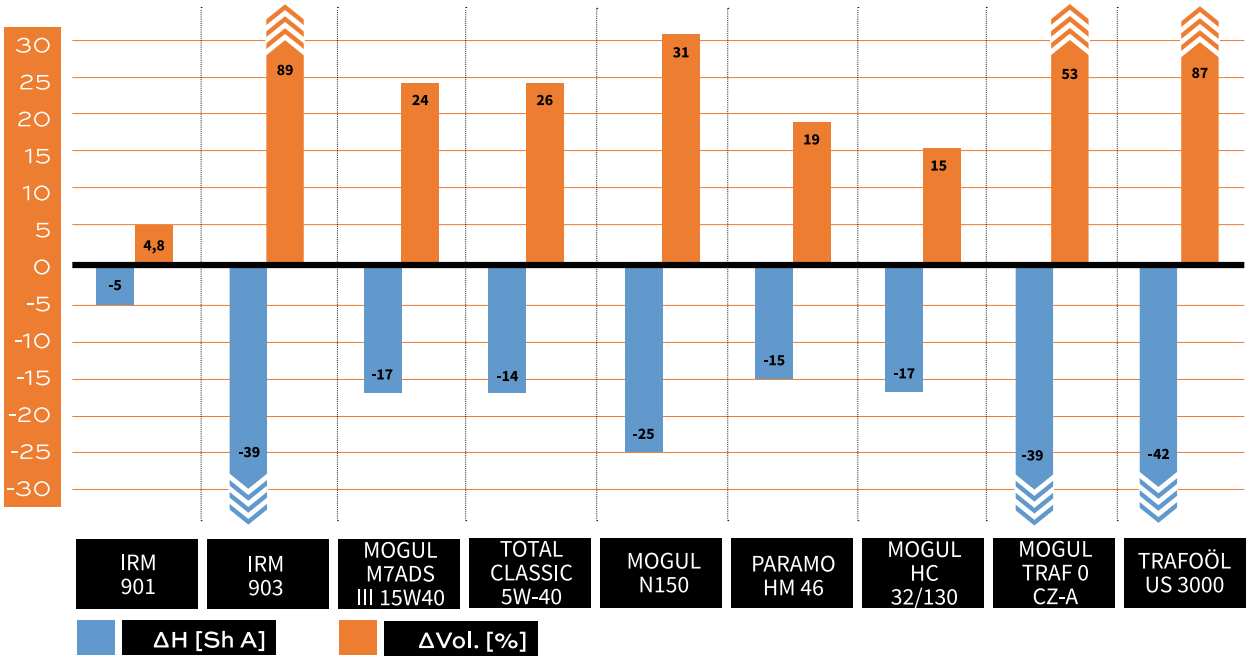


BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S6 — EPDM96


RUBBER FLOORING WIDE RIBBED — S6-EPDM96

EXTERIOR	80 +/- 5 Sh A	3.5 mm	3.1 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT



Bottom side - cloth impression



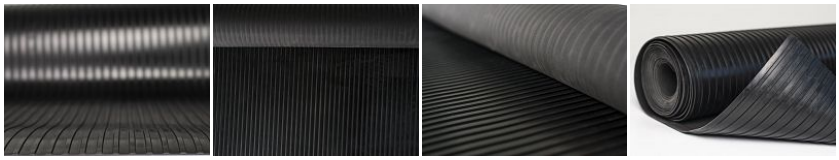

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S6, heat-resistant in black color. In standard thickness 3.5 mm. It weighs 3 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3.5 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S6 — EPDM95

GUMOVÁ DEZÉNOVÁ DLÁŽKOVINA ŠIROKO RYHOVANÁ — S6-EPDM95

EXTERIOR	70 +/- 5 Sh A	3.5 mm	3.1 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT





Bottom side - cloth impression











ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S6, heat-resistant in black color. In standard thickness 3.5 mm. It weighs 3 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3.5 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S6 — EPDM15

RUBBER FLOORING WIDE RIBBED — S6-EPDM15

EXTERIOR	60 +/- 5 Sh A	3.5 mm	3 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT





Bottom side - cloth impression











ADDITIONAL INFORMATION

Temperature range -40/+125 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S6, heat-resistant in black color. In standard thickness 3.5 mm. It weighs 2.9 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3.5 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S5 — NBR72


RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S5-NBR72

INTERIOR ENVIRONMENT	70 +/- 5 Sh A HARDNESS	3 mm THICKNESS	3.5 kg/m² BASIS WEIGHT

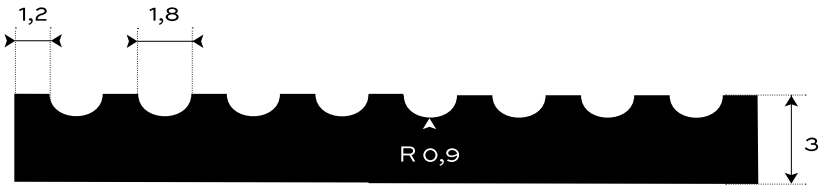

Bottom side - cloth impression



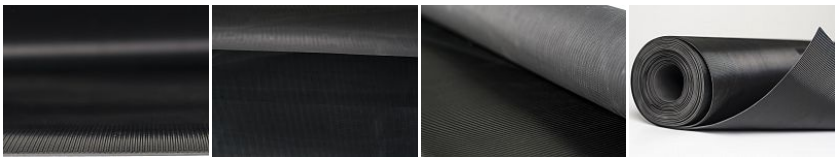

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a fine ribbed pattern type S5, oil-resistant in black color. In standard thickness 3 mm. It weighs 3.5 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S5 — NBR72

RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S5-NBR72

7672 SWELLING RATES

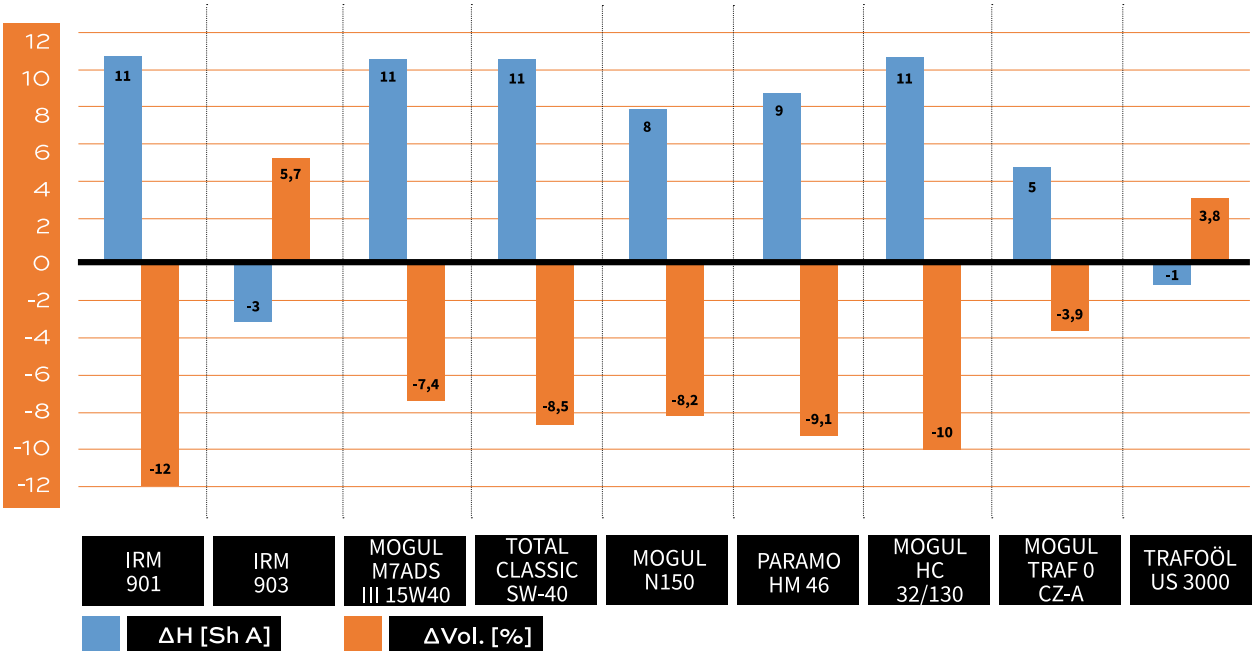


BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S5 — NBR45


RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S5-NBR45

INTERIOR ENVIRONMENT	65 +/- 5 Sh A HARDNESS	3 mm THICKNESS	4.6 kg/m² BASIS WEIGHT

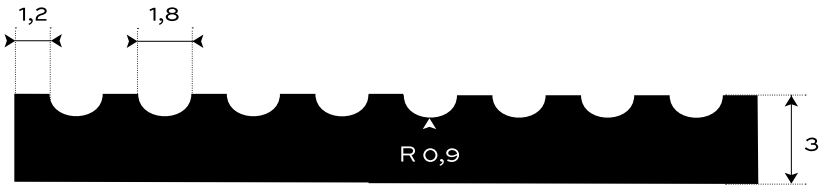

Bottom side - cloth impression



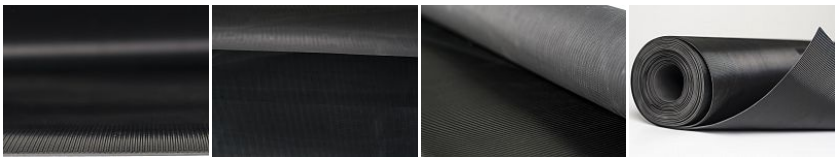

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	NO
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and easy to maintain with easy handling. In a fine ribbed pattern type S5, oil-resistant in black color. In standard thickness 3 mm. It weighs 4.6 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S5 — NBR45

RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S5-NBR45

7645 SWELLING RATES

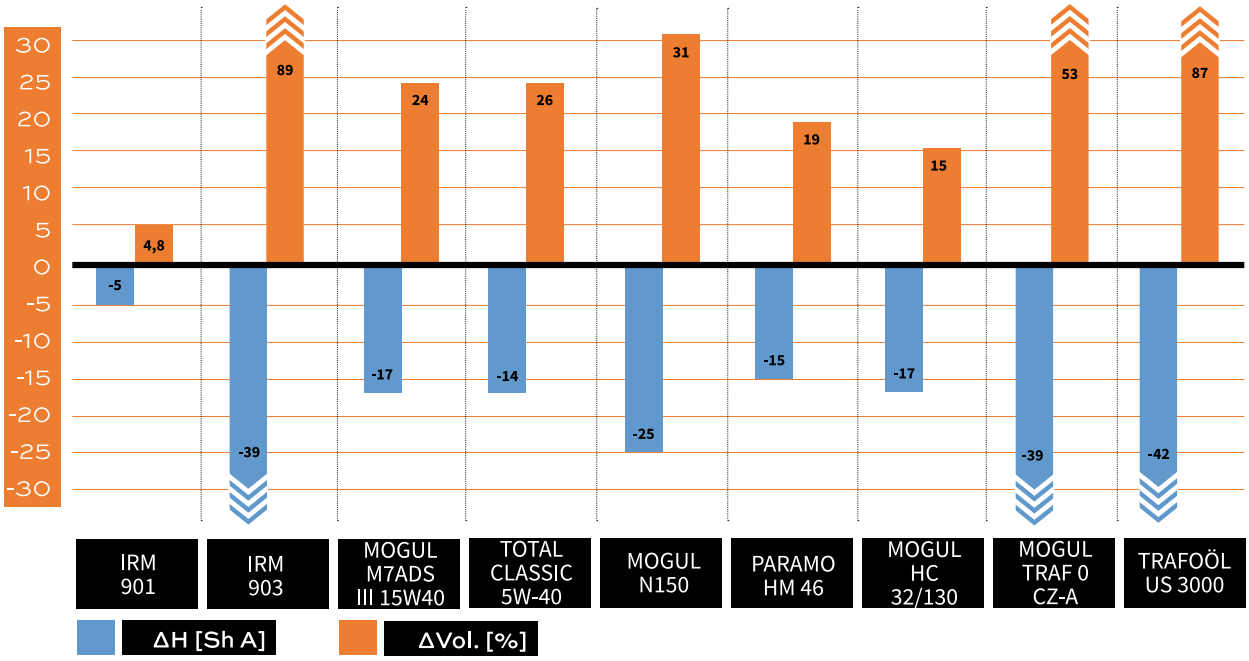


BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S5 — EPDM96


RUBBER FLOORING FINE RIBBED — S5-EPDM96

EXTERIOR	80 +/- 5 Sh A	3 mm	3.5 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

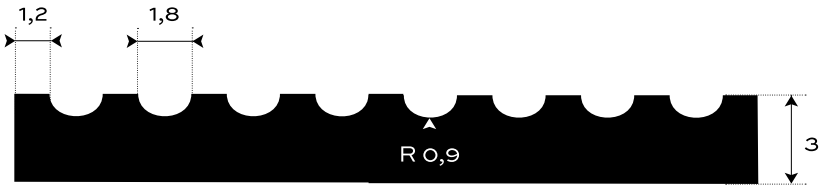

Bottom side - cloth impression



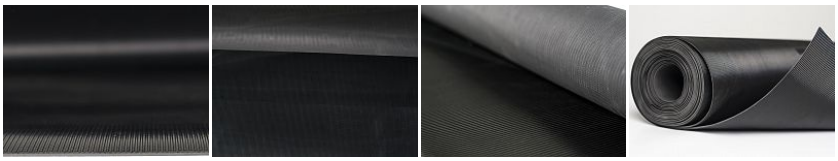

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a fine grooved design of the S5 type, heat-resistant in black color. In standard thickness 3 mm. It weighs 3.4 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S5 — EPDM95


RUBBER FLOORING FINE RIBBED — S5-EPDM95

EXTERIOR	70 +/- 5 Sh A	0 MPa	3 mm	3.5 kg/m²
ENVIRONMENT	HARDNESS	TENSILE STRENGTH	THICKNESS	BASIS WEIGHT

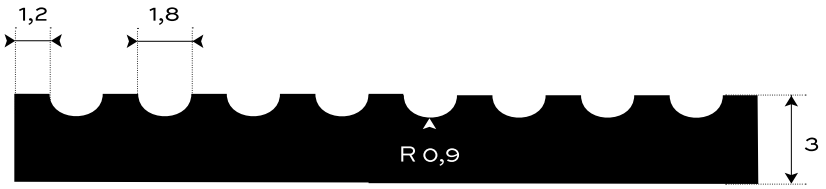

Bottom side - cloth impression



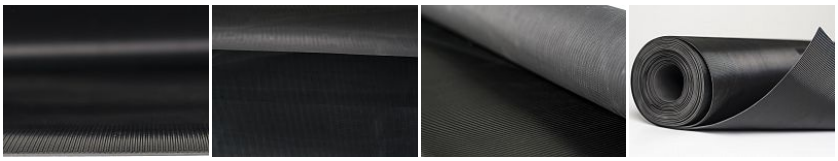

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a fine grooved design of the S5 type, heat-resistant in black color. In standard thickness 3 mm. It weighs 3.4 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH

10 m	(+/- 200 mm)

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE


Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S5 — EPDM15


RUBBER FLOORING FINE RIBBED — S5-EPDM15

EXTERIOR	60 +/- 5 Sh A	3 mm	3.4 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

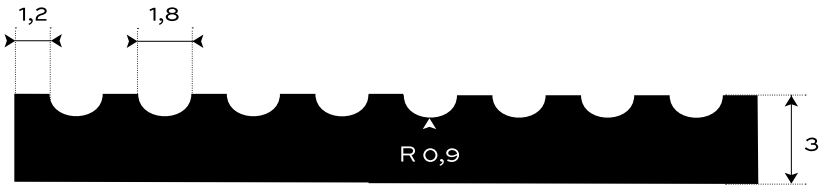

Bottom side - cloth impression



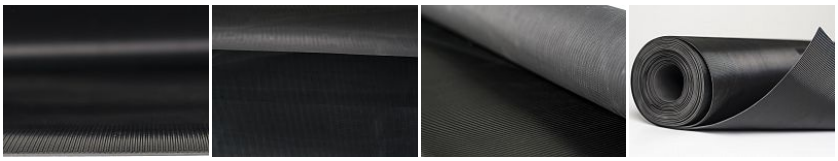

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a fine grooved design of the S5 type, heat-resistant in black color. In standard thickness 3 mm. It weighs 3.4 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH

10 m	(+/- 200 mm)

ADDITIONAL INFORMATION

Temperature range -40/+125 °C.

RESISTANCE


Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S4 — NBR72


RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S4-NBR72

INTERIOR ENVIRONMENT	70 +/- 5 Sh A HARDNESS	6 mm THICKNESS	6.4 kg/m² BASIS WEIGHT



Bottom side - cloth impression



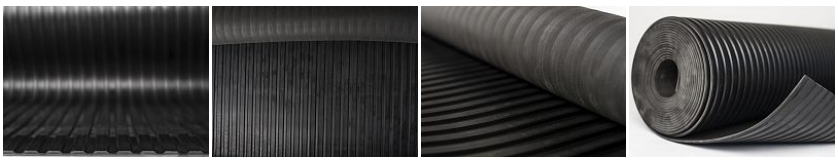

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide grooved pattern type S4, oil-resistant in black color. In standard thickness 6 mm. It weighs 6.2 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

6 mm (+/- 0,5 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

LENGTH


10 m (+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S4 — NBR72

RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S4-NBR72

7672 SWELLING RATES

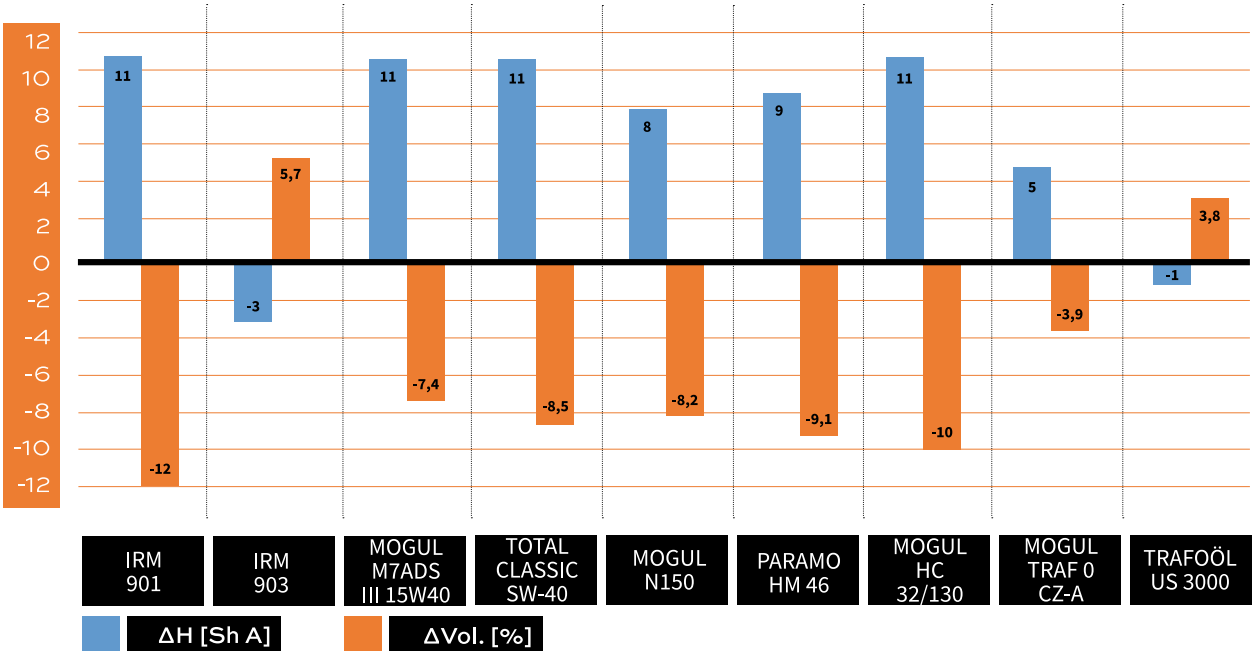


BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S4 — NBR45


RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S4-NBR45

INTERIOR ENVIRONMENT	65 +/- 5 Sh A HARDNESS	6 mm THICKNESS	8.2 kg/m² BASIS WEIGHT



Bottom side - cloth impression



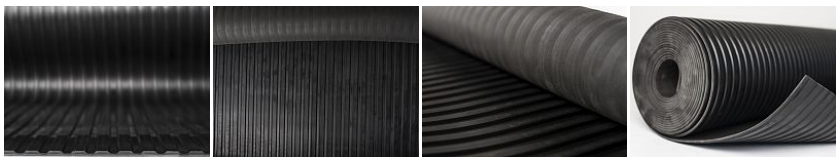

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	NO
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide grooved pattern type S4, oil-resistant in black color. In standard thickness 6 mm. It weighs 8.2 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

6 mm (+/- 0,5 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

LENGTH


10 m (+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S4 — NBR45

RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S4-NBR45

7645 SWELLING RATES

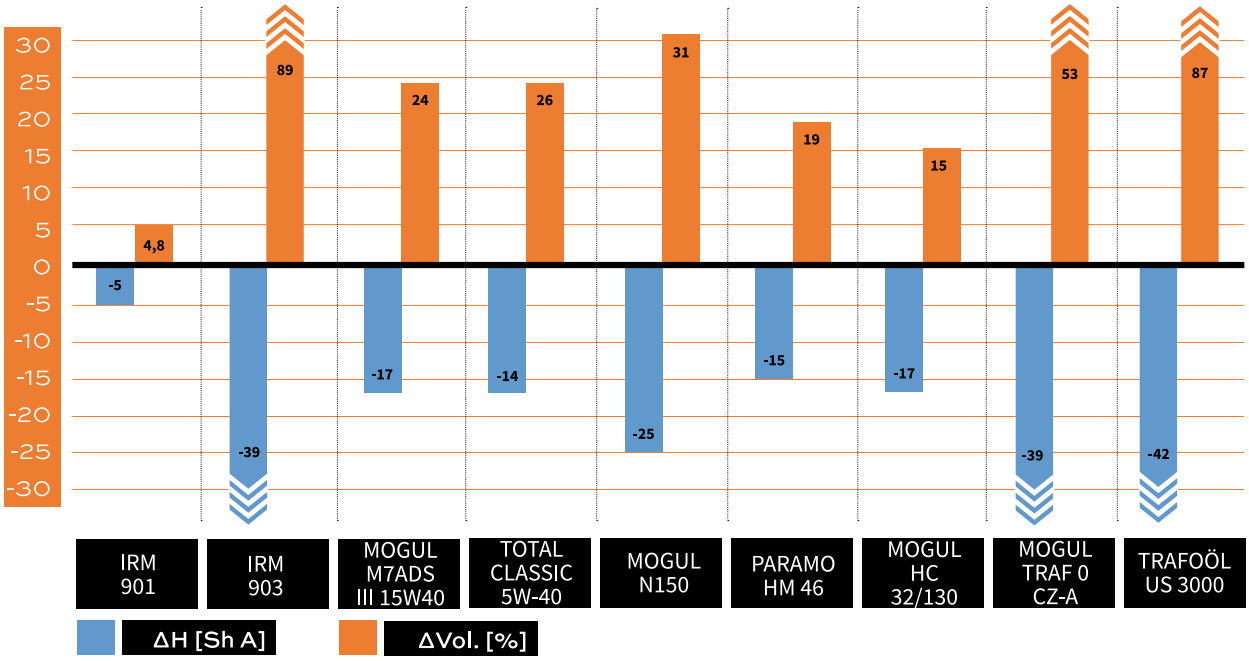


BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S4 — EPDM96


RUBBER FLOORING WIDE RIBBED — S4-EPDM96

EXTERIOR	80 +/- 5 Sh A	6 mm	6.4 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT



Bottom side - cloth impression











ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S4, heat-resistant in black color. In standard thickness 6 mm. It weighs 6.2 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

6 mm (+/- 0,5 mm)

WIDTH

1000 mm (+/- 10 mm)

1200 mm (+/- 10 mm)

LENGTH


10 m (+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S4 — EPDM95


RUBBER FLOORING WIDE RIBBED — S4-EPDM95

EXTERIOR	70 +/- 5 Sh A	6 mm	6.4 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT



Bottom side - cloth impression











ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S4, heat-resistant in black color. In standard thickness 6 mm. It weighs 6.2 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

6 mm (+/- 0,5 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

LENGTH


10 m (+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S4 — EPDM15


RUBBER FLOORING WIDE RIBBED — S4-EPDM15

EXTERIOR	60 +/- 5 Sh A	6 mm	6.1 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT



Bottom side - cloth impression



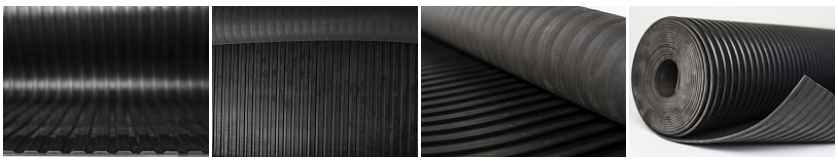

ADDITIONAL INFORMATION

Temperature range -40/+125 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S4, heat-resistant in black color. In standard thickness 6 mm. It weighs 6.1 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

6 mm	(+/- 0,5 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S2 — NBR72


RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S2-NBR72

INTERIOR ENVIRONMENT	70 +/- 5 Sh A HARDNESS	3 mm THICKNESS	3.5 kg/m² BASIS WEIGHT

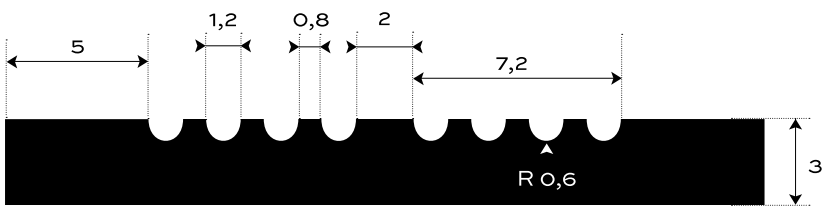

Bottom side - cloth impression



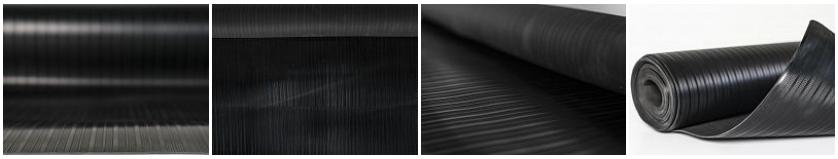

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a finely grooved pattern of the S2 type, oil-resistant in black color. In standard thickness 3 mm. It weighs 3.5 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S2 — NBR72

RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S2-NBR72

7672 SWELLING RATES

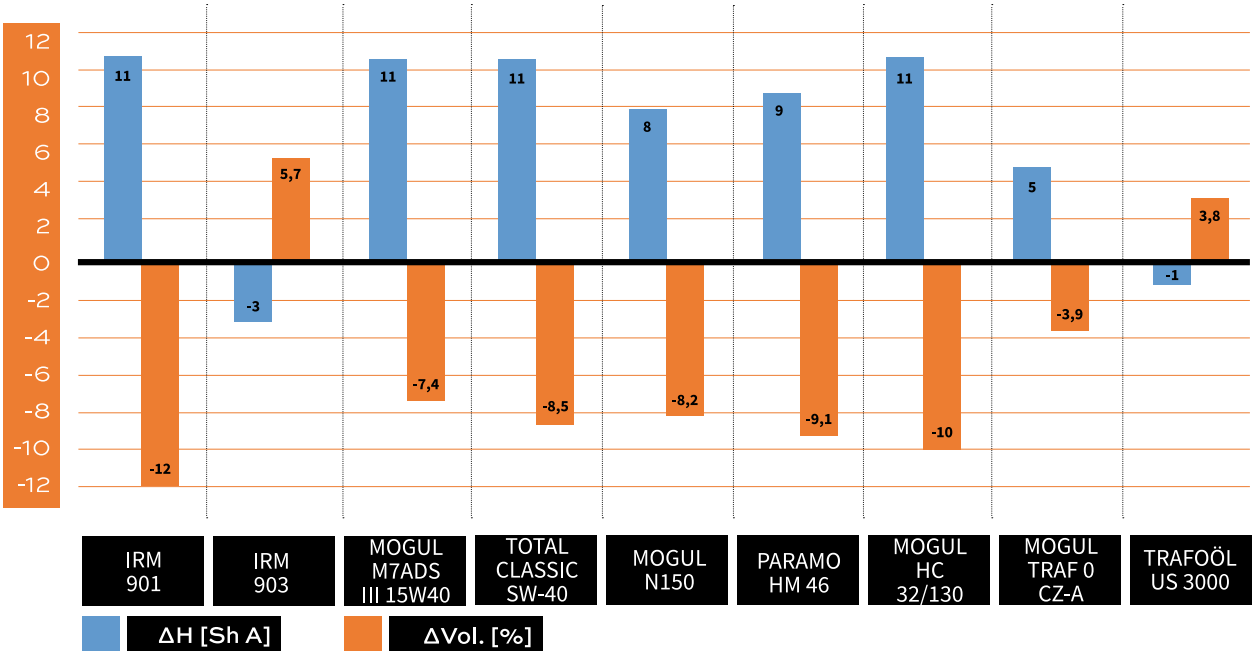


BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S2 — NBR45


RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S2-NBR45

INTERIOR ENVIRONMENT	65 +/- 5 Sh A HARDNESS	3 mm THICKNESS	4.6 kg/m² BASIS WEIGHT

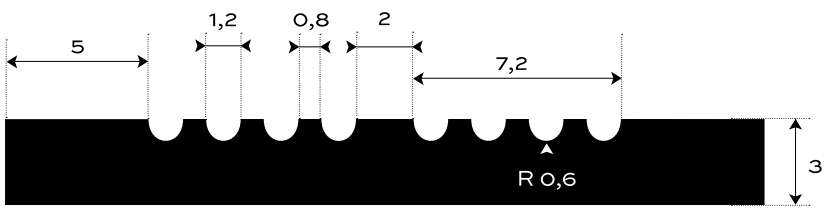

Bottom side - cloth impression



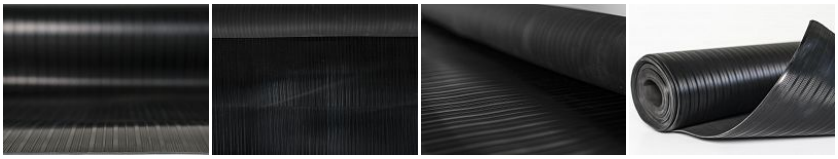

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	NO
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a finely grooved pattern of the S2 type, oil-resistant in black color. In standard thickness 3 mm. It weighs 4.6 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S2 — NBR45

RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S2-NBR45

7645 SWELLING RATES

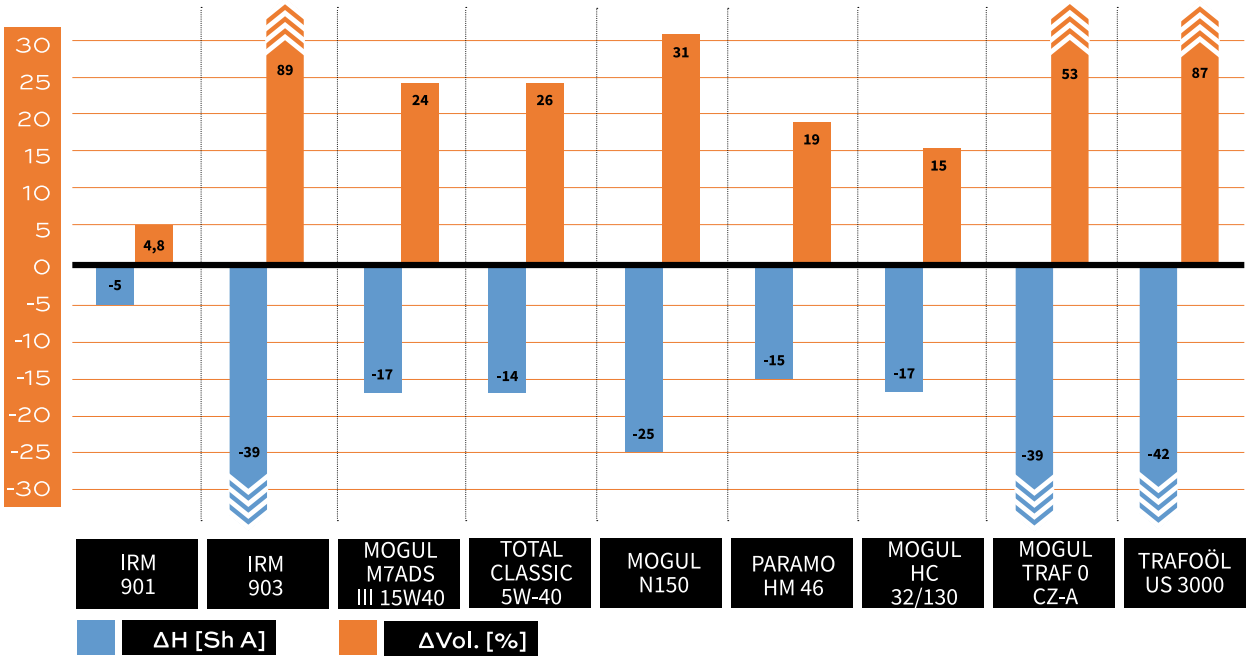


BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S2 — EPDM96


RUBBER FLOORING FINE RIBBED — S2-EPDM96

EXTERIOR	80 +/- 5 Sh A	3 mm	3.5 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

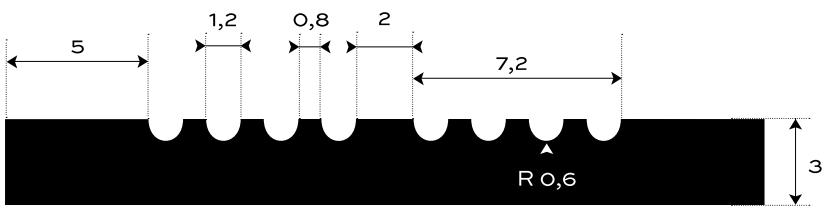

Bottom side - cloth impression



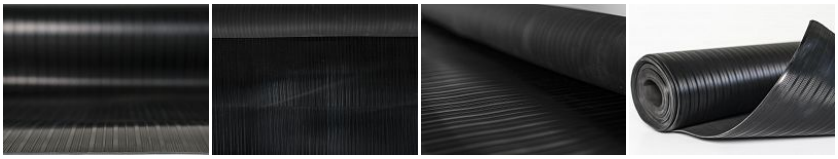

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a finely grooved pattern of the S2 type, heat-resistant in black color. In standard thickness 3 mm. It weighs 3.4 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S2 — EPDM95


RUBBER FLOORING FINE RIBBED — S2-EPDM95

EXTERIOR	70 +/- 5 Sh A	3 mm	3.5 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

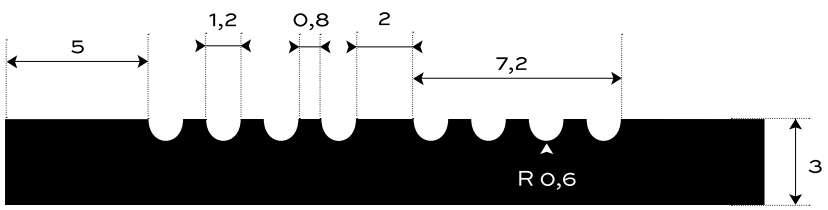

Bottom side - cloth impression



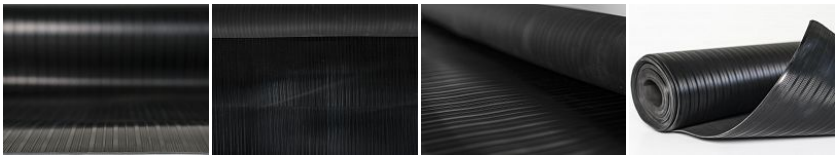

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a finely grooved pattern of the S2 type, heat-resistant in black color. In standard thickness 3 mm. It weighs 3.4 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S2 — EPDM15


RUBBER FLOORING FINE RIBBED — S2-EPDM15

EXTERIOR	60 +/- 5 Sh A	3 mm	3.4 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

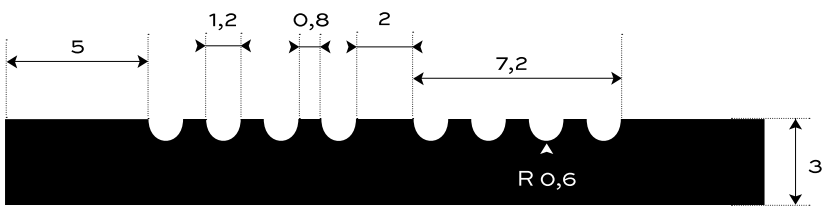

Bottom side - cloth impression



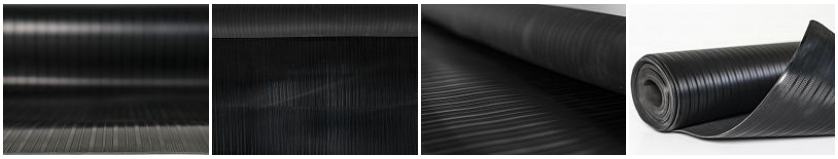

ADDITIONAL INFORMATION

Temperature range -40/+125 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a finely grooved pattern of the S2 type, heat-resistant in black color. In standard thickness 3 mm. It weighs 3.4 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH

10 m	(+/- 200 mm)


BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S1 — NBR72

RUBBER FLOORING WIDE RIBBED OIL RESISTANT - S1-NBR72




INTERIOR ENVIRONMENT	70 +/- 5 Sh A HARDNESS	4 mm THICKNESS	3.8 kg/m² BASIS WEIGHT

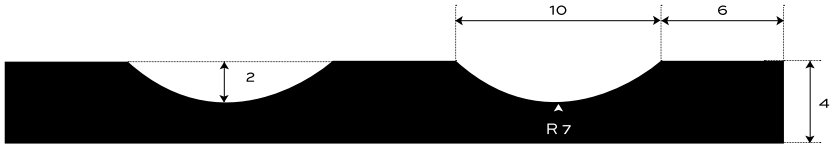

Bottom side - cloth impression



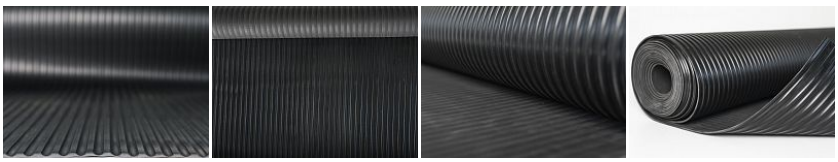

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide grooved pattern of the S1 type, oil-resistant in black. In standard thickness 4 mm. It weighs 3.6 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH

10 m	(+/- 200 mm)

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE


Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S1 — NBR72

RUBBER FLOORING WIDE RIBBED OIL RESISTANT - S1-NBR72

7672 SWELLING RATES

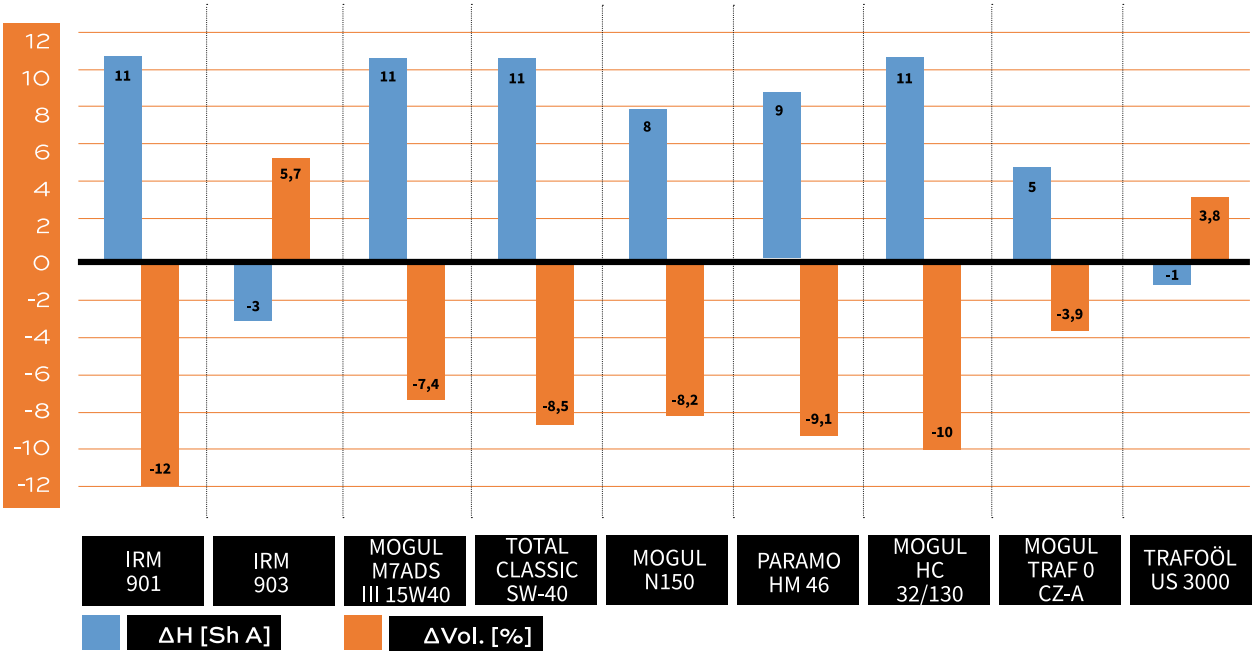


BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S1 — NBR45


RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S1-NBR45

INTERIOR ENVIRONMENT	65 +/- 5 Sh A HARDNESS	4 mm THICKNESS	4.9 kg/m² BASIS WEIGHT

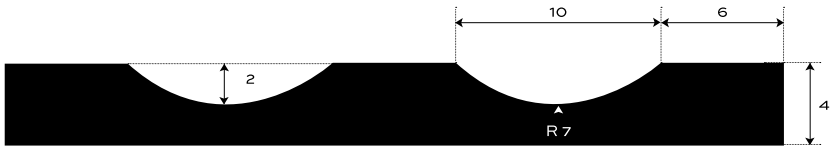

Bottom side - cloth impression



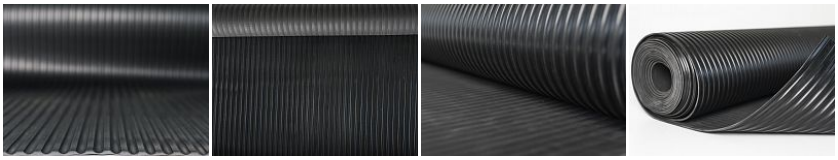

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	NO
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide grooved pattern of the S1 type, oil-resistant in black. In standard thickness 4 mm. It weighs 4.8 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S1 — NBR45

RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S1-NBR45

7645 SWELLING RATES

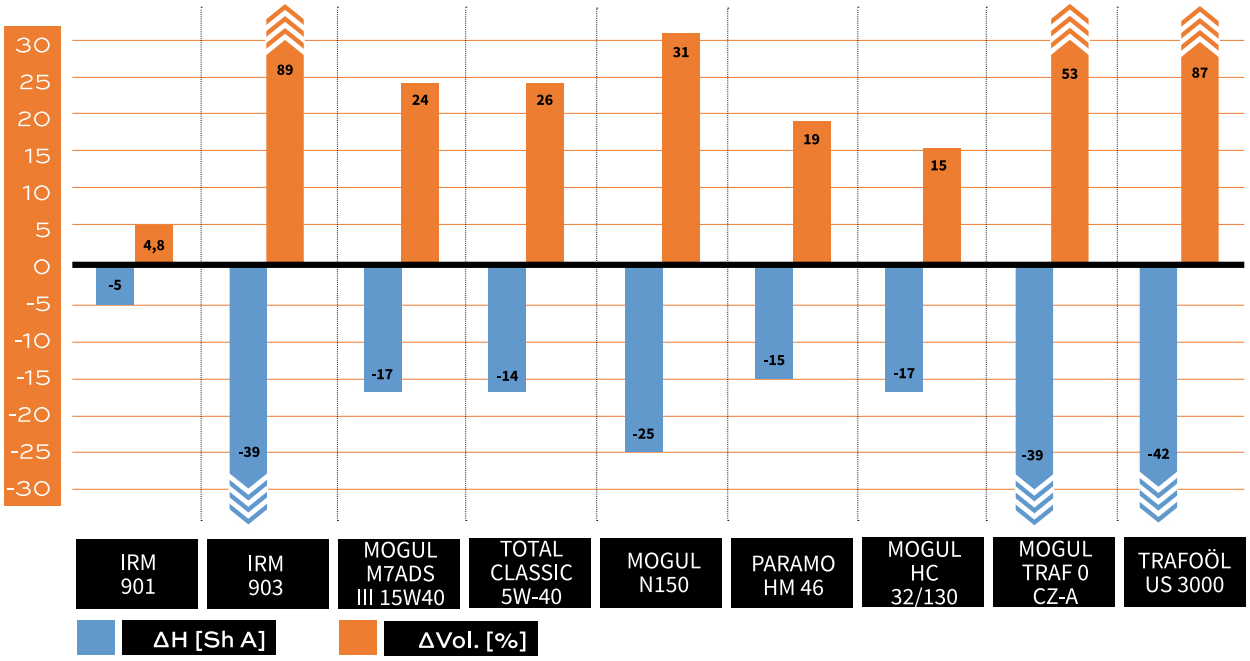


BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S1 — EPDM96

RUBBER FLOORING WIDE RIBBED — S1-EPDM96




EXTERIOR	80 +/- 5 Sh A	4 mm	3.8 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

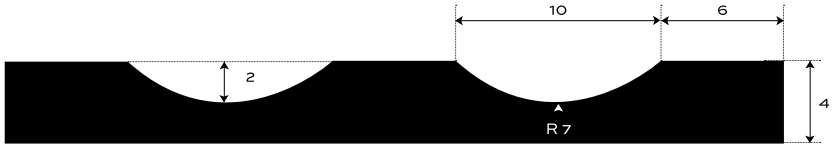

Bottom side - cloth impression



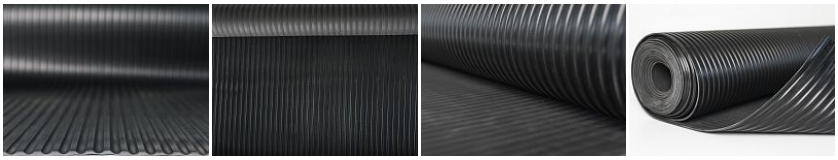

Rubber roofing for interior and exterior surfaces. Durable and easy to maintain with easy handling. In a wide ribbed pattern type S1, heat-resistant in black. In standard thickness 4 mm. It weighs 3.6 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH

10 m	(+/- 200 mm)

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE


Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S1 — EPDM95


RUBBER FLOORING WIDE RIBBED — S1-EPDM95

EXTERIOR	70 +/- 5 Sh A	4 -5 mm	3.8 -4.8 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

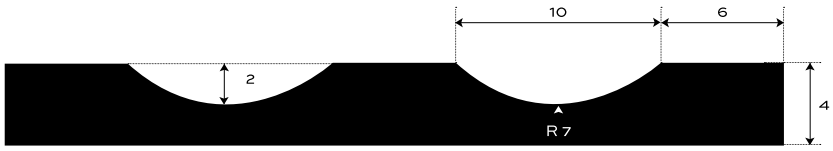

Bottom side - cloth impression



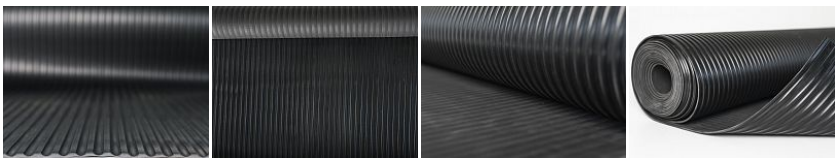

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and easy to maintain with easy handling. In a wide ribbed pattern type S1, heat-resistant in black. In standard thickness 4 mm. It weighs 3.6 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm	(+/- 0,3 mm)
5 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S1 — EPDM15


RUBBER FLOORING WIDE RIBBED — S1-EPDM15

EXTERIOR	60 +/- 5 Sh A	4 mm	3.7 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

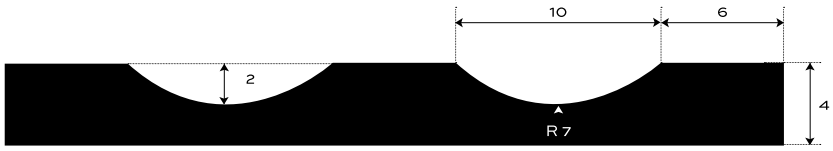

Bottom side - cloth impression



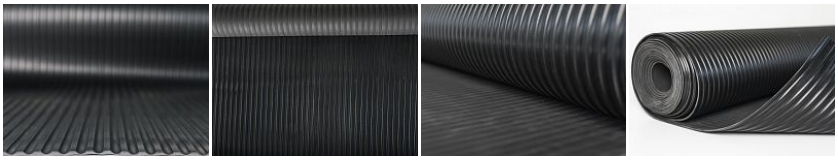

Rubber roofing for interior and exterior surfaces. Durable and easy to maintain with easy handling. In a wide ribbed pattern type S1, heat-resistant in black. In standard thickness 4 mm. It weighs 3.5 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH

10 m	(+/- 200 mm)

ADDITIONAL INFORMATION

Temperature range -40/+125 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk