


RUBBER SHEETING PARA QUALITY 7689 — NR



40 +/- 5	Sh A	12	MPa	1	g/cm ³	600	%	-25 - +70	°C	1-10	mm	INTERIOR
HARDNESS		TENSILE STRENGTH		DENSITY		ELONGATION		TEMPERATURE RANGE		THICKNESS		ENVIRONMENT

Sealing plate high-strength and highly elastic with increased abrasion resistance. Made on the basis of natural rubber NR with various physical and mechanical properties. With the possibility of specifying the thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.

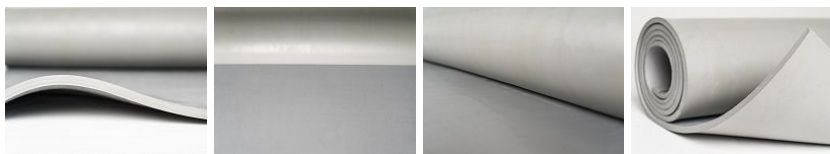

RESISTANCE

Abrasion resistance	HIGHLY RESISTANT
Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	MEDIUM RESISTANT
Acid resistance	MEDIUM RESISTANT
Oil resistance	NO
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,8 mm)
10 mm	(+/- 0,8 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 10 mm)
------------------------------	-----------------------------