
7816 — EPDM-NR

RUBBER SHEETING FOOD GRADE 7816 — EPDM-NR

[redacted]

ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS
INTERIOR	1.27 g/cm³	-40 – +125 °C	60 +/- 5 Sh A	400 %	6 MPa	1 -10 mm

Sealing plate made in food quality in white. It meets the requirements of Article 3 of Regulation (EC) No. 1935/2004 of 27 October 2004 on materials and articles intended to come into contact with food. Made on the basis of EPDM-NR with various physical-mechanical properties. With the possibility of specifying the required thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs).

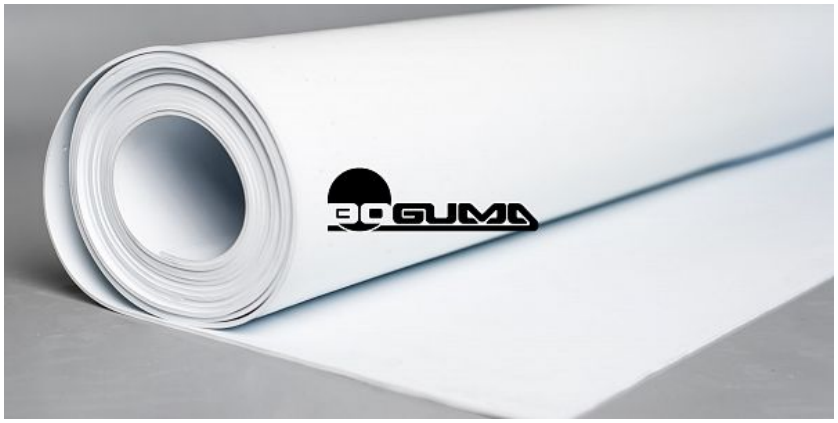



ADDITIONAL INFORMATION

color might be not stable if used outdoor

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	MEDIUM RESISTANT
Acid resistance	MEDIUM RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,8 mm)
10 mm	(+/- 0,8 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 10 mm)
1 reinforcement layer	(for thicknesses 2 - 10 mm)
2 reinforcement layers	(for thicknesses 3 - 10 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk