9001 — CR-NR

RUBBER SHEETING SOUNDPROOF 9001 — CR-NR

[redacted]

ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS
INTERIOR	2.44 g/cm³	-25 – +80 °C	65 +/- 5 Sh A	100 %	3 MPa	2.5 mm

Sealing plate made of a special self-extinguishing material with acoustic properties of a sound barrier. Designed for use without demands for resistance to negative environmental influences and without mechanical stress. Made on the basis of CR and NR rubbers with slight resistance to acids, alkalis and oils. In standard thickness 2.5 mm and width max 1,400 mm. Complete the exact specification in the configurator.



RESISTANCE

Alkaline resistance	MEDIUM RESISTANT
Acid resistance	MEDIUM RESISTANT
Oil resistance	MEDIUM RESISTANT

CONFIGURATION OPTIONS

THICKNESS

2.5 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

LENGTH

10 m (+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS


without reinforcement layers (for thicknesses 2.5 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

9001 — CR-NR

RUBBER SHEETING SOUNDPROOF 9001 — CR-NR

SOUND LOSS TM E-90

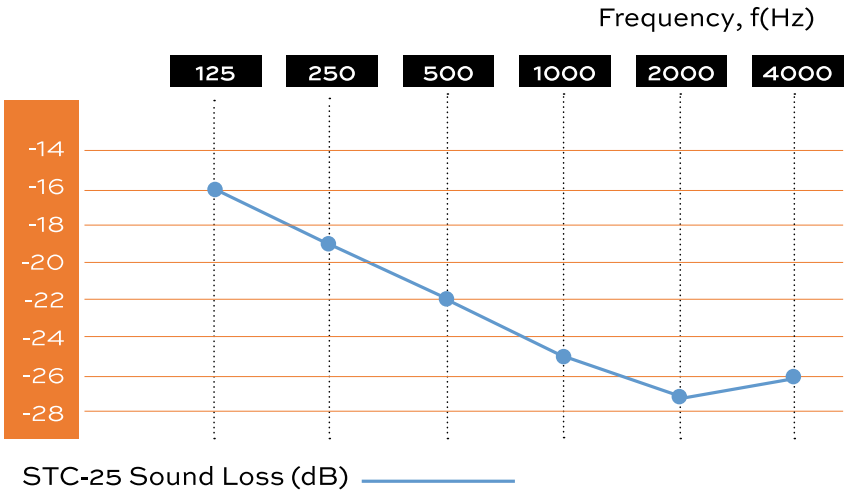

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk