


DEKo-S7-1

ELECTRICAL INSULATING MATTING CLASS O FINE RIBBED - S7



3 mm THICKNESS 3.3 kg/m² BASIS WEIGHT 65 +/- 5 Sh A HARDNESS INTERIOR ENVIRONMENT

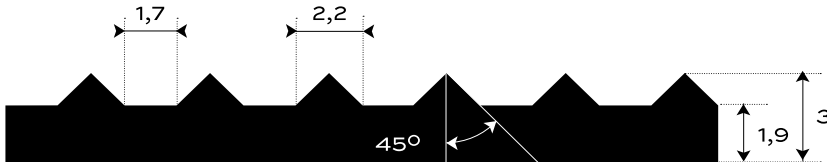

Bottom side - cloth impression



ADDITIONAL INFORMATION

As standard, we supply rolls 1 or 1,2 m wide and 10 m long. However, we can also provide custom cuts: 0,6x0,6 m; 0,6x1m; 1x1m; 1,2x1m or others.

RESISTANCE ACCORDING TO IEC 61111:2009

| | |
|--|-----|
| Mechanical puncture resistance | YES |
| Test for slip resistance | YES |
| Dielectric tests according given class | YES |
| Ageing tests | YES |
| Low temperature folding test | YES |
| Flame retardance test | YES |
| Oil resistance | YES |
| Acid resistance | YES |

Electrical insulating matting certified according to IEC 61111:2009 in class O, with an operating voltage of 1,000 V, a test voltage of 5,000 V and a withstanding voltage of 10,000 V, with permanently vulcanized marking tape. Vulcanized elastomer fine grooved is available in gray or dark gray color, 3 mm thick (+/- 0.3mm) with basic weight 3.3 kg/m².

CONFIGURATION OPTIONS

THICKNESS

3 mm (+/- 0,3 mm)

WIDTH

1000 mm (+/- 10 mm)

1200 mm (+/- 10 mm)

LENGTH

10 m (+/- 200 mm)