
DEK2-S7-1

ELECTRICAL INSULATING MATTING
CLASS 2 FINE RIBBED

INTERIOR	65 +/- 5 Sh A	3 mm	3.4 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT



Bottom side - cloth impression

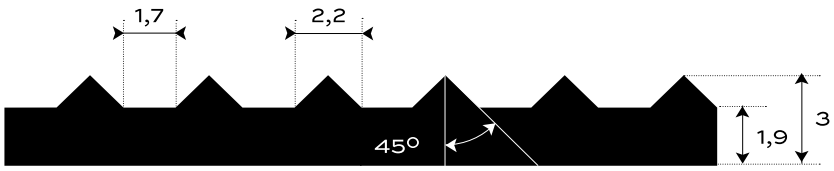



Electrical insulating matting certified according to IEC 61111:2009 in class 2, with an operating voltage of 17 000 V, a test voltage of 20 000 V and a withstanding voltage of 30 000 V, with permanently vulcanized marking tape. Vulcanized elastomer fine ribbed is available in gray, dark gray and yellow color, 3 mm thick (+/- 0.3mm) with basic weight 3,4 kg/m². This Product is suitable exlusively for interior use.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)

WIDTH

1000 mm	(+/- 10 mm)
1200 mm	(+/- 10 mm)

LENGTH

10 m	(+/- 200 mm)

ADDITIONAL INFORMATION

As standard, we supply rolls 1 or 1,2 m wide and 10 m long. However, we can also provide custom custs: 0,6x0,6 m; 0,6x1m; 1x1m; 1,2x1m or others.

RESISTANCE ACCORDING TO IEC 61111:2009

Mechanical puncture resistance	YES
Test for slip resistance	YES
Dielectric tests according given class	YES
Ageing tests	YES
Low temperature folding test	YES
Flame retardance test	YES
Oil resistance	YES
Acid resistance	YES