DEK4-Ho-IR

ELECTRICAL INSULATING MATTING
CLASS 4 SMOOTH - Ho


[redacted]

INTERIOR	65 +/- 5 Sh A	4.5 mm	6.9 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

Top side - smooth surface

[redacted]

Bottom side - cloth impression

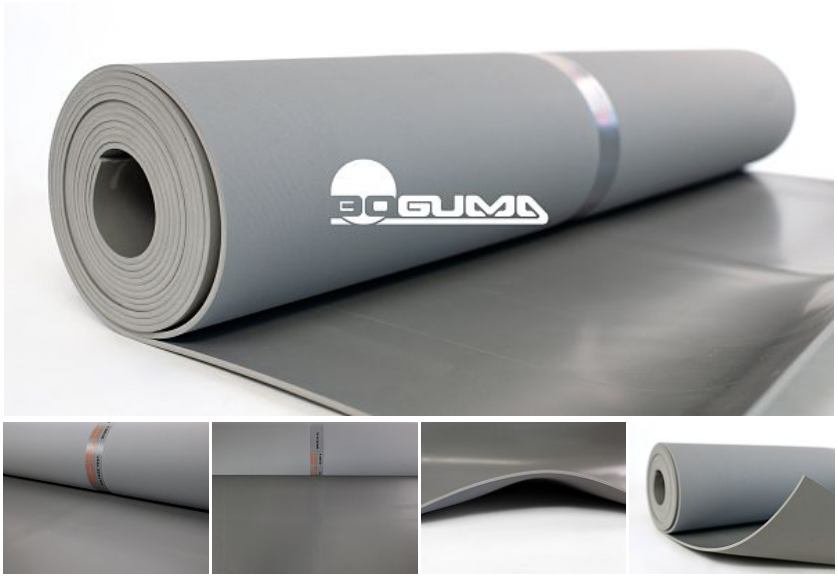

ADDITIONAL INFORMATION

As standard, we supply rolls 1 or 1,2 m wide and 10 m long. However, we can also provide custom custs: 0,6x0,6 m; 0,6x1m; 1x1m; 1,2x1m or others.

RESISTANCE ACCORDING TO IEC 61111:2009

Mechanical puncture resistance	YES
Test for slip resistance	YES
Dielectric tests according given class	YES
Ageing tests	YES
Low temperature folding test	YES
Flame retardance test	YES
Oil resistance	YES
Acid resistance	YES

Electrical insulating matting certified according to IEC 61111:2009 in class 4, with an operating voltage of 36,000 V, a test voltage of 40,000 V and a withstanding voltage of 50,000 V, with permanently vulcanized marking tape. Vulcanized elastomer smooth with cloth impression on bottom side is available in gray color, 4.5 mm thick (+0.6/-0.2mm) with basic weight 6.1 kg/m².

CONFIGURATION OPTIONS

THICKNESS

4.5 mm	(+ 0,6 /- 0,2 mm)

WIDTH

1000 mm	(+/- 10 mm)
1200 mm	(+/- 10 mm)

LENGTH

10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk