
S1 — EPDM95


RUBBER FLOORING WIDE RIBBED — S1-EPDM95

EXTERIOR	70 +/- 5 Sh A	4 -5 mm	3.8 -4.8 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT



Bottom side - cloth impression

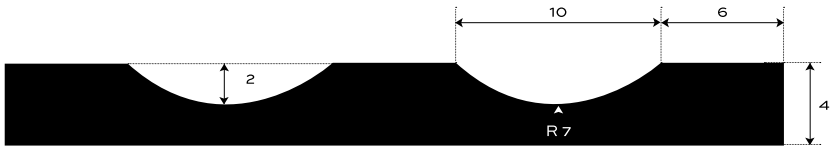

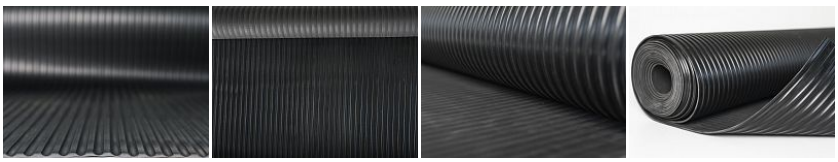

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and easy to maintain with easy handling. In a wide ribbed pattern type S1, heat-resistant in black. In standard thickness 4 mm. It weighs 3.6 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm	(+/- 0,3 mm)
5 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH

10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk