



RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S1-NBR45



INTERIOR ENVIRONMENT	65 +/- 5 HARDNESS	Sh A	4 THICKNESS	mm	4.9 BASIS WEIGHT	kg/m ²
-------------------------	----------------------	------	----------------	----	---------------------	-------------------

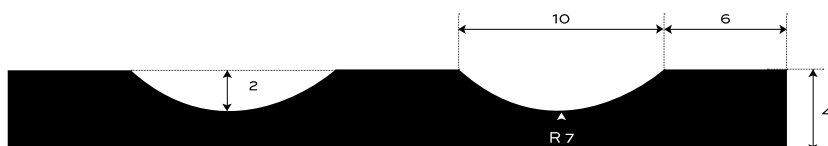

Bottom side - cloth impression

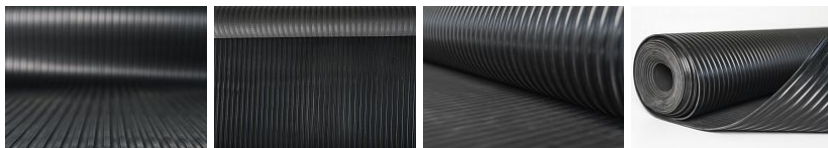

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	NO
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide grooved pattern of the S1 type, oil-resistant in black. In standard thickness 4 mm. It weighs 4.8 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm	(+/- 0,3 mm)
------	--------------

WIDTH

1200 mm	(+/- 10 mm)
---------	-------------

1000 mm	(+/- 10 mm)
---------	-------------

LENGTH

10 m	(+/- 200 mm)
------	--------------

RUBBER FLOORING WIDE RIBBED OIL- RESISTANT - S1-NBR45

7645 SWELLING RATES

