



RUBBER FLOORING WIDE RIBBED OIL RESISTANT - S1-NBR72



INTERIOR ENVIRONMENT	70 +/- 5 HARDNESS	Sh A	4 THICKNESS	mm	3.8 BASIS WEIGHT	kg/m ²
-------------------------	----------------------	------	----------------	----	---------------------	-------------------

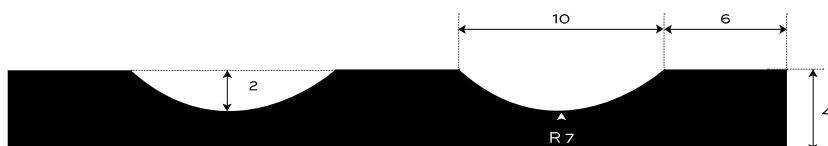

Bottom side - cloth impression

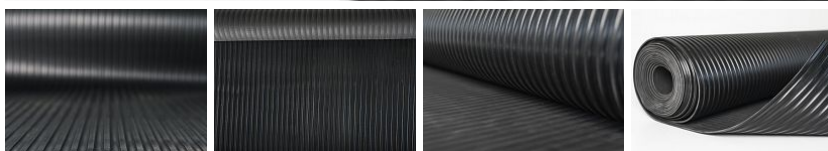

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide grooved pattern of the S1 type, oil-resistant in black. In standard thickness 4 mm. It weighs 3.6 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

LENGTH

10 m (+/- 200 mm)

S1 — NBR72

RUBBER FLOORING WIDE RIBBED OIL RESISTANT - S1-NBR72

7672 SWELLING RATES

