



# RUBBER FLOORING WIDE RIBBED — S1-SBR-STD



<b>INTERIOR</b>	80 +/- 5 <b>Sh A</b>	4 <b>mm</b>	4.7 <b>kg/m<sup>2</sup></b>
<b>ENVIRONMENT</b>	<b>HARDNESS</b>	<b>THICKNESS</b>	<b>BASIS WEIGHT</b>

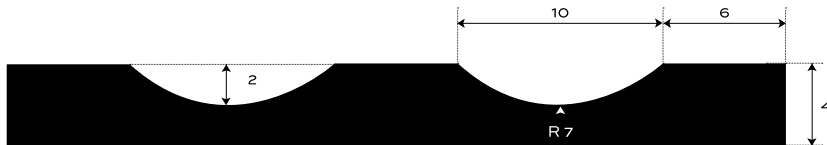

Bottom side - cloth impression

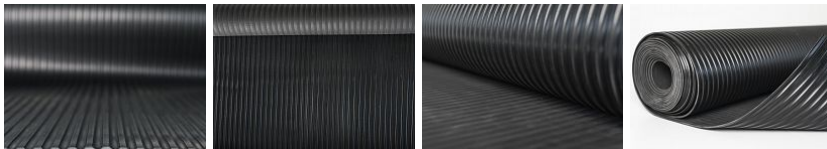

## ADDITIONAL INFORMATION

Temperature range -25/+80 °C

## RESISTANCE

Weather resistance NO  
Ozone resistance NO  
UV resistance NO  
Alkaline resistance NO  
Acid resistance NO  
Oil resistance NO  
Gasoline resistance NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S1, in the basic design in black. In standard thickness 4 mm. It weighs 4.8 kg / m<sup>2</sup>. Specify in the configurator.

## CONFIGURATION OPTIONS

### THICKNESS

4 mm (+/- 0,3 mm)

### WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

### LENGTH

10 m (+/- 200 mm)