
S1 — SBR-BLACK

# RUBBER FLOORING WIDE RIBBED — S1-SBR-STD




| INTERIOR ENVIRONMENT | 80 +/- 5 Sh A HARDNESS | 4 mm THICKNESS | 4.7 kg/m² BASIS WEIGHT |
|---|---|---|---|

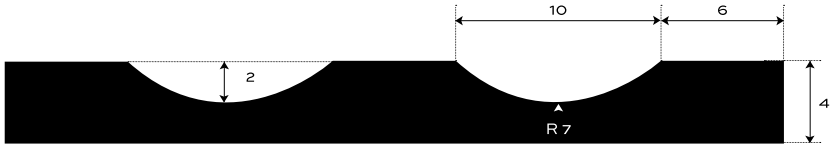


Bottom side - cloth impression



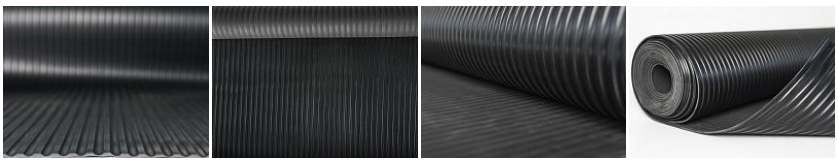

## ADDITIONAL INFORMATION

Temperature range -25/+80 °C

## RESISTANCE

| | |
|---|---|
| Weather resistance | NO |
| Ozone resistance | NO |
| UV resistance | NO |
| Alkaline resistance | NO |
| Acid resistance | NO |
| Oil resistance | NO |
| Gasoline resistance | NO |

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S1, in the basic design in black. In standard thickness 4 mm. It weighs 4.8 kg / m2. Specify in the configurator.

## CONFIGURATION OPTIONS

### THICKNESS

| | |
|---|---|
| 4 mm | (+/- 0,3 mm) |

### WIDTH

| | |
|---|---|
| 1200 mm | (+/- 10 mm) |
| 1000 mm | (+/- 10 mm) |

### LENGTH

| | |
|---|---|
| 10 m | (+/- 200 mm) |

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk