
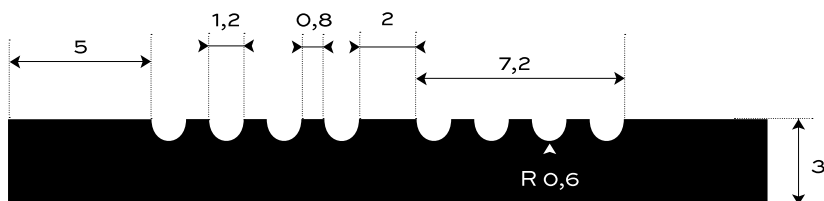


RUBBER FLOORING FINE RIBBED — S2-  
SBR-COLOR

<b>INTERIOR</b>	80 +/- 5 <b>Sh A</b>	3 <b>mm</b>	3.9-4.1 <b>kg/m<sup>2</sup></b>
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT

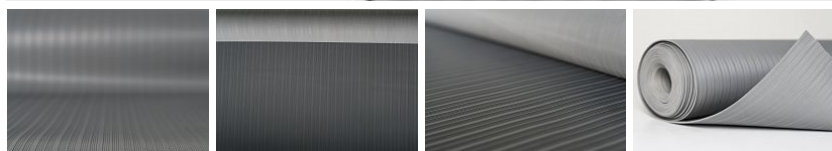

Bottom side - cloth impression

**ADDITIONAL INFORMATION**

Temperature range -25/+80 °C.

**RESISTANCE**

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a finely grooved design of the S2 type, in the basic design in three colors: gray, blue and green. In standard thickness 3 mm. It weighs 4.1 kg / m<sup>2</sup>. Specify in the configurator.

**CONFIGURATION OPTIONS****THICKNESS**

3 mm (+/- 0,3 mm)

**WIDTH**

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

**LENGTH**

10 m (+/- 200 mm)