

S4 — EPDM96


# RUBBER FLOORING WIDE RIBBED — S4-EPDM96



<b>EXTERIOR</b>	80 +/- 5	<b>Sh A</b>	6	<b>mm</b>	6.4	<b>kg/m<sup>2</sup></b>
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	



Bottom side - cloth impression

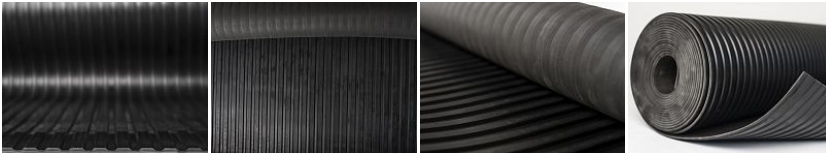

## ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

## RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S4, heat-resistant in black color. In standard thickness 6 mm. It weighs 6.2 kg / m<sup>2</sup>. Specify in the configurator.

## CONFIGURATION OPTIONS

### THICKNESS

6 mm (+/- 0,5 mm)

### WIDTH

1000 mm (+/- 10 mm)

1200 mm (+/- 10 mm)

### LENGTH

10 m (+/- 200 mm)