

S4 — NBR45


# RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S4-NBR45



<b>INTERIOR</b>	65 +/- 5	<b>Sh A</b>	6	<b>mm</b>	8.2	<b>kg/m<sup>2</sup></b>
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	



Bottom side - cloth impression

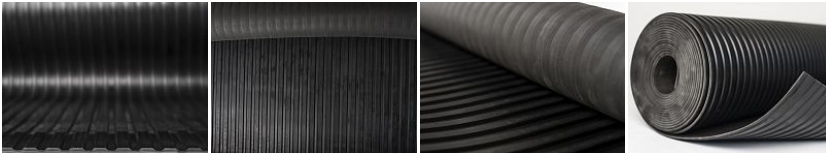

## ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

## RESISTANCE

Alkaline resistance NO  
 Acid resistance NO  
 Oil resistance HIGHLY RESISTANT  
 Gasoline resistance MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide grooved pattern type S4, oil-resistant in black color. In standard thickness 6 mm. It weighs 8.2 kg / m<sup>2</sup>. Specify in the configurator.

## CONFIGURATION OPTIONS

### THICKNESS

6 mm (+/- 0,5 mm)

### WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

### LENGTH

10 m (+/- 200 mm)

# RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S4-NBR45

## 7645 SWELLING RATES

