



# RUBBER FLOORING WIDE RIBBED PATTERN — S4-SBR76



<b>INTERIOR</b>	80 +/- 5 <b>Sh A</b>	5-6 <b>mm</b>	5.7-6.3 <b>kg/m<sup>2</sup></b>
<b>ENVIRONMENT</b>	<b>HARDNESS</b>	<b>THICKNESS</b>	<b>BASIS WEIGHT</b>



Bottom side - cloth impression

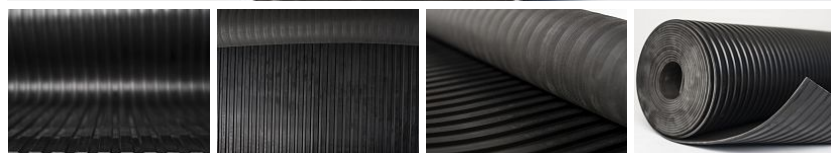

## RESISTANCE

Abrasion resistance	HIGHLY RESISTANT
Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. With a wide ribbed type S4, in black color. In standard thickness 6 mm. It weighs 6.3 kg / m<sup>2</sup>.

## CONFIGURATION OPTIONS

### THICKNESS

5 mm (+/- 0,5 mm)

6 mm (+/- 0,5 mm)

### WIDTH

1230 mm (+/- 10 mm)

### LENGTH

10 m (+/- 200 mm)