
S6 — NBR45


RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S6-NBR45

INTERIOR ENVIRONMENT	65 +/- 5 Sh A HARDNESS	3.5 mm THICKNESS	4.1 kg/m² BASIS WEIGHT



Bottom side - cloth impression

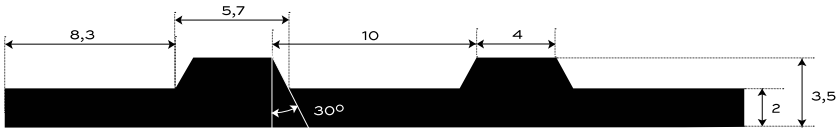

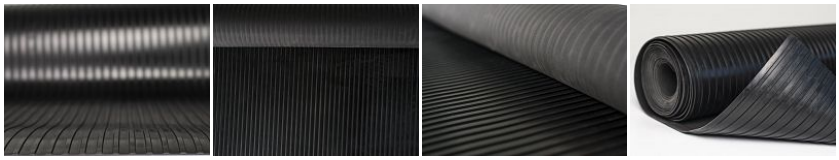

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	NO
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and easy to maintain with easy handling. In a wide ribbed pattern type S6, oil-resistant in black color. In standard thickness 3.5 mm. It weighs 4.1 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3.5 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S6 — NBR45

RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S6-NBR45

7645 SWELLING RATES

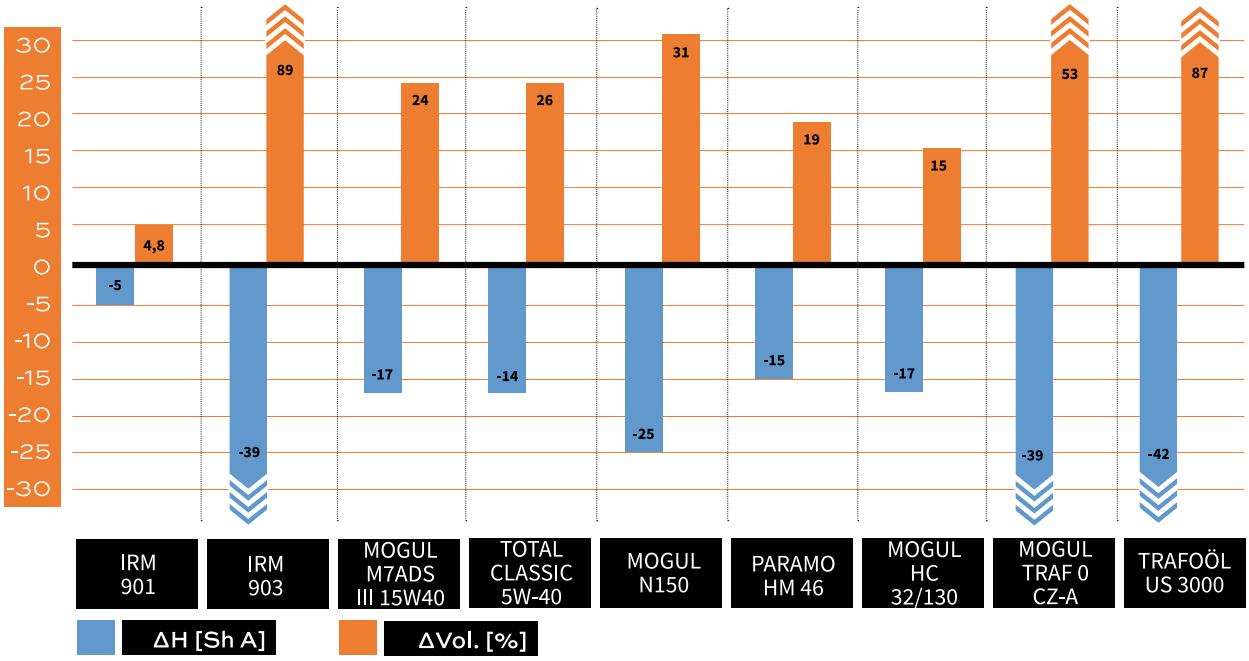

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk