



# RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S6-NBR72



<b>INTERIOR</b> ENVIRONMENT	70 +/- 5 <b>Sh A</b> HARDNESS	3.5 <b>mm</b> THICKNESS	3.1 <b>kg/m<sup>2</sup></b> BASIS WEIGHT
--------------------------------	----------------------------------	----------------------------	---

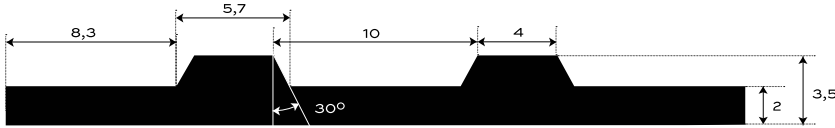

Bottom side - cloth impression

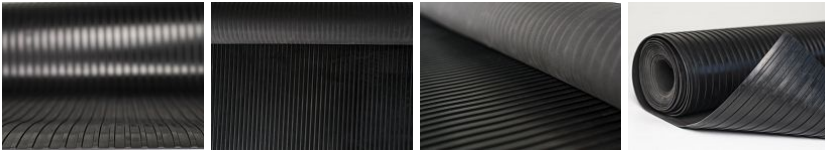

## ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

## RESISTANCE

Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

Rubber roofing for interior surfaces. Durable and easy to maintain with easy handling. In a wide grooved pattern type S6, oil-resistant in black color. In standard thickness 3.5 mm. It weighs 3.1 kg / m<sup>2</sup>. Specify in the configurator.

## CONFIGURATION OPTIONS

THICKNESS	
3.5 mm	(+/- 0,3 mm)
WIDTH	
1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)
LENGTH	
10 m	(+/- 200 mm)

# RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S6-NBR72

## 7672 SWELLING RATES

