
S6 — NBR72


RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S6-NBR72

INTERIOR ENVIRONMENT	70 +/- 5 Sh A HARDNESS	3.5 mm THICKNESS	3.1 kg/m² BASIS WEIGHT



Bottom side - cloth impression

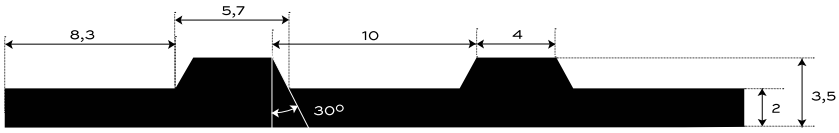

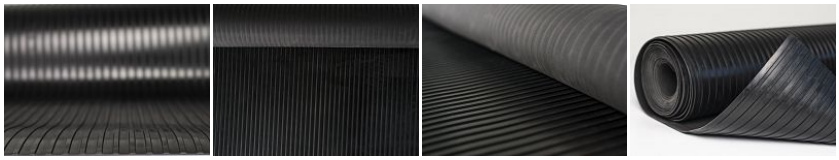

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

Rubber roofing for interior surfaces. Durable and easy to maintain with easy handling. In a wide grooved pattern type S6, oil-resistant in black color. In standard thickness 3.5 mm. It weighs 3.1 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3.5 mm	(+/- 0,3 mm)

WIDTH

1200 mm	(+/- 10 mm)
1000 mm	(+/- 10 mm)

LENGTH


10 m	(+/- 200 mm)

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

S6 — NBR72

RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S6-NBR72

7672 SWELLING RATES

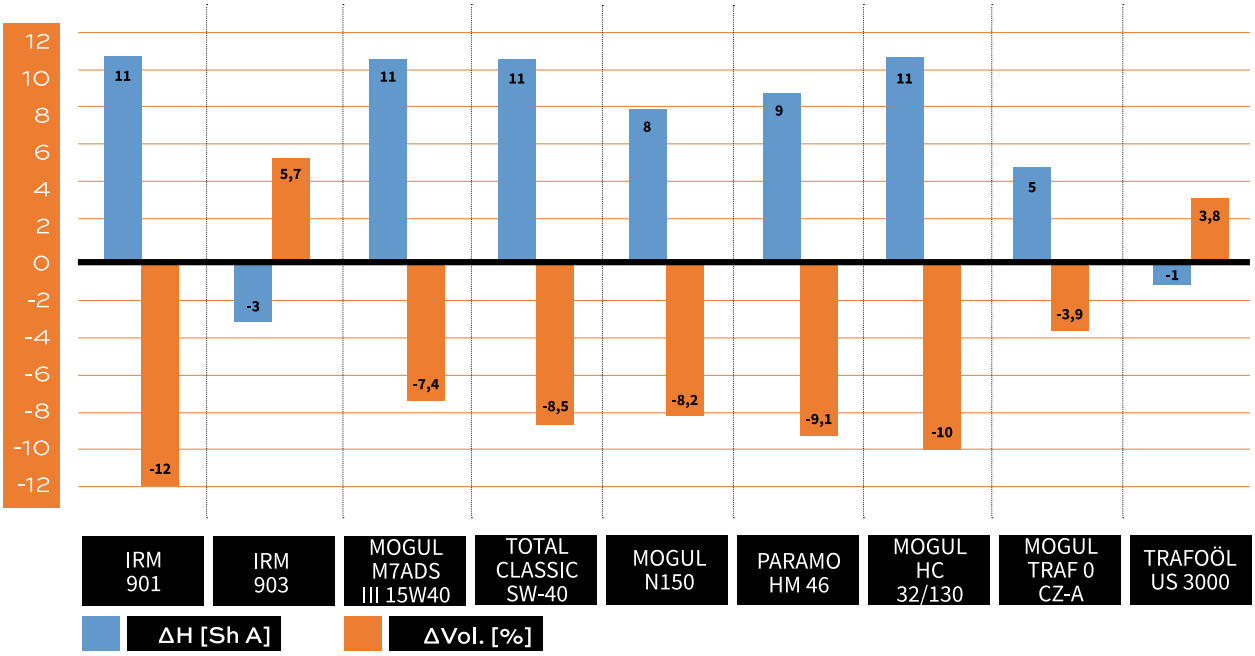

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk