


S6 — SBR-BLACK


# RUBBER FLOORING WIDE RIBBED — S6-SBR-STD



<b>INTERIOR</b>	80 +/- 5	<b>Sh A</b>	3.5	<b>mm</b>	4.1	<b>kg/m<sup>2</sup></b>
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	



Bottom side - cloth impression

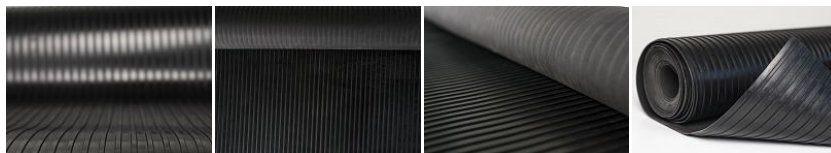

## ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

## RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S6, in the basic design in black color. In standard thickness 3.5 mm. It weighs 3.9 kg / m<sup>2</sup>. Specify in the configurator.

## CONFIGURATION OPTIONS

### THICKNESS

3.5 mm (+/- 0,3 mm)

### WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

### LENGTH

10 m (+/- 200 mm)