



# RUBBER FLOORING COIN PATTERN — S8-EPDM15



|                    |                 |             |                  |           |                     |              |
|--------------------|-----------------|-------------|------------------|-----------|---------------------|--------------|
| <b>EXTERIOR</b>    | 60 +/- 5        | <b>Sh A</b> | 4                | <b>mm</b> | 5                   | <b>kg/m²</b> |
| <b>ENVIRONMENT</b> | <b>HARDNESS</b> |             | <b>THICKNESS</b> |           | <b>BASIS WEIGHT</b> |              |



Bottom side - cloth impression

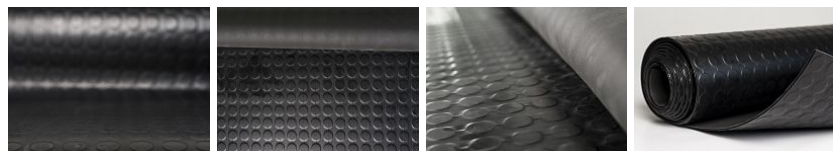

## ADDITIONAL INFORMATION

Temperature range -40/+125 °C.

## RESISTANCE

|                     |                  |
|---------------------|------------------|
| Weather resistance  | HIGHLY RESISTANT |
| Ozone resistance    | HIGHLY RESISTANT |
| UV resistance       | HIGHLY RESISTANT |
| Alkaline resistance | HIGHLY RESISTANT |
| Acid resistance     | HIGHLY RESISTANT |
| Oil resistance      | MEDIUM RESISTANT |
| Gasoline resistance | NO               |

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. With a coin pattern (round stud) type S8, heat-resistant in black color. In standard thickness 4 mm. It weighs 4.9 kg / m2. Specify in the configurator.

## CONFIGURATION OPTIONS

### THICKNESS

4 mm (+/- 0,3 mm)

### WIDTH

1230 mm (+/- 10 mm)

### LENGTH

10 m (+/- 200 mm)