



# RUBBER FLOORING COIN PATTERN OIL-RESISTANT - S8-NBR72



<b>INTERIOR ENVIRONMENT</b>	70 +/- 5 <b>Sh A</b>	4-10 <b>mm</b>	5.1-13.15 <b>kg/m<sup>2</sup></b>
	<b>HARDNESS</b>	<b>THICKNESS</b>	<b>BASIS WEIGHT</b>



Bottom side - cloth impression

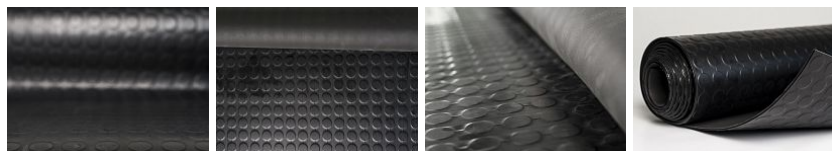

## ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

## RESISTANCE

Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. With coin pattern (round stud) type S8, oil-resistant in black. In standard thickness 4 mm. It weighs 5.1 kg / m<sup>2</sup>. Specify in the configurator.

## CONFIGURATION OPTIONS

### THICKNESS

4 mm	(+/- 0,3 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)

### WIDTH

1230 mm	(+/- 10 mm)
---------	-------------

### LENGTH

10 m	(+/- 200 mm)
------	--------------

# RUBBER FLOORING COIN PATTERN OIL-RESISTANT - S8-NBR72

## 7672 SWELLING RATES

