


RUBBER SHEETING FOR GENERAL USE 9035 — SBR



INTERIOR	1.51 g/cm³	-25 – +70 °C	65 +/- 5 Sh A	400 %	6 MPa	1-10 mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of SBR rubber compound in white color. With the possibility of specifying the required thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.

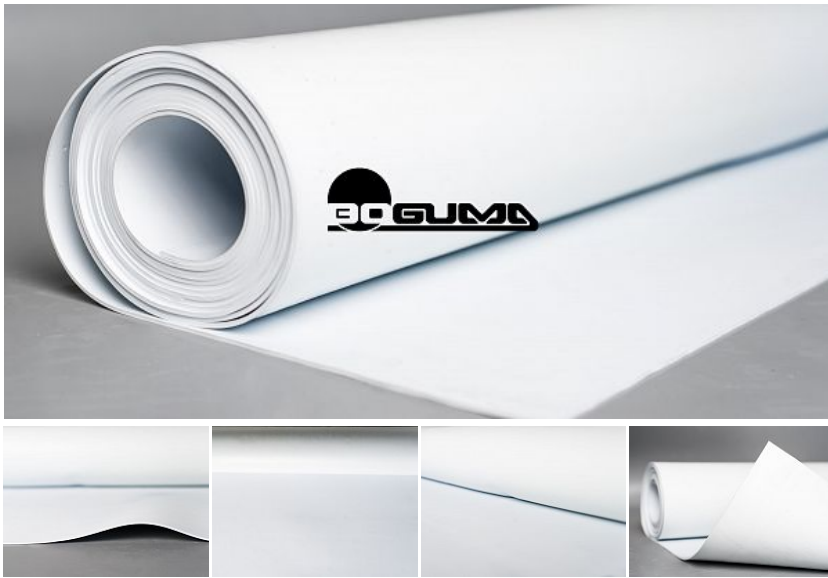

RESISTANCE

- Weather resistance NO
- Ozone resistance NO
- UV resistance NO
- Alkaline resistance NO
- Acid resistance NO
- Oil resistance NO
- Gasoline resistance NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 10 mm)
.....	
1 reinforcement layer	(for thicknesses 2 - 10 mm)
.....	
2 reinforcement layers	(for thicknesses 3 - 10 mm)