
DEKo-S7-1


# ELECTRICAL INSULATING MATTING
# CLASS 0 FINE RIBBED - S7

| INTERIOR | 65 +/- 5 Sh A | 3 mm | 3.4 kg/m² |
|---|---|---|---|
| ENVIRONMENT | HARDNESS | THICKNESS | BASIS WEIGHT |




Bottom side - cloth impression

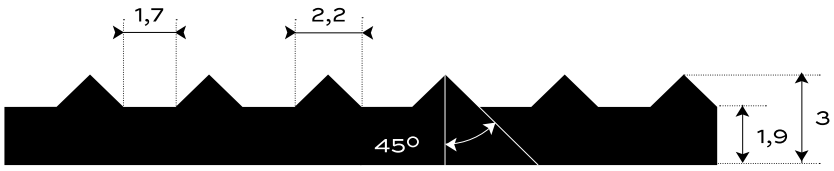

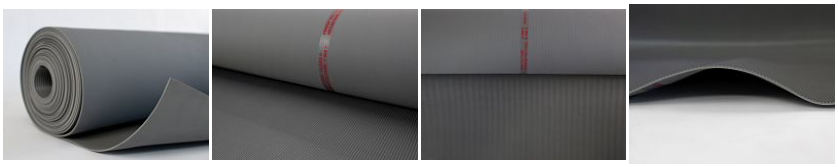

## ADDITIONAL INFORMATION

As standard, we supply rolls 1 or 1,2 m wide and 10 m long. However, we can also provide custom custs: 0,6x0,6 m; 0,6x1m; 1x1m; 1,2x1m or others.

## RESISTANCE ACCORDING TO IEC 61111:2009

| | |
|---|---|
| Mechanical puncture resistance | YES |
| Test for slip resistance | YES |
| Dielectric tests according given class | YES |
| Ageing tests | YES |
| Low temperature folding test | YES |
| Flame retardance test | YES |
| Oil resistance | YES |
| Acid resistance | YES |

Electrical insulating matting certified according to IEC 61111:2009 in class 0, with an operating voltage of 1,000 V, a test voltage of 5,000 V and a withstanding voltage of 10,000 V, with permanently vulcanized marking tape. Vulcanized elastomer fine ribbed is available in gray or dark gray color, 3 mm thick (+/- 0.3mm) with basic weight 3.4 kg/m².

## CONFIGURATION OPTIONS

### THICKNESS

| | |
|---|---|
| 3 mm | (+/- 0,3 mm) |

### WIDTH

| | |
|---|---|
| 1000 mm | (+/- 10 mm) |
| 1200 mm | (+/- 10 mm) |

### LENGTH

| | |
|---|---|
| 10 m | (+/- 200 mm) |

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk